Antec

FLUX REAR

Mid Tower Case

FLOW LUXURY

F-LUX Platform, abbreviation of Flow Luxury, features ultra case structure design for excellent airflow and 5 fans included, delivering enhanced GPU cooling performance.

- FLUX Platform Patent Number: 11259440

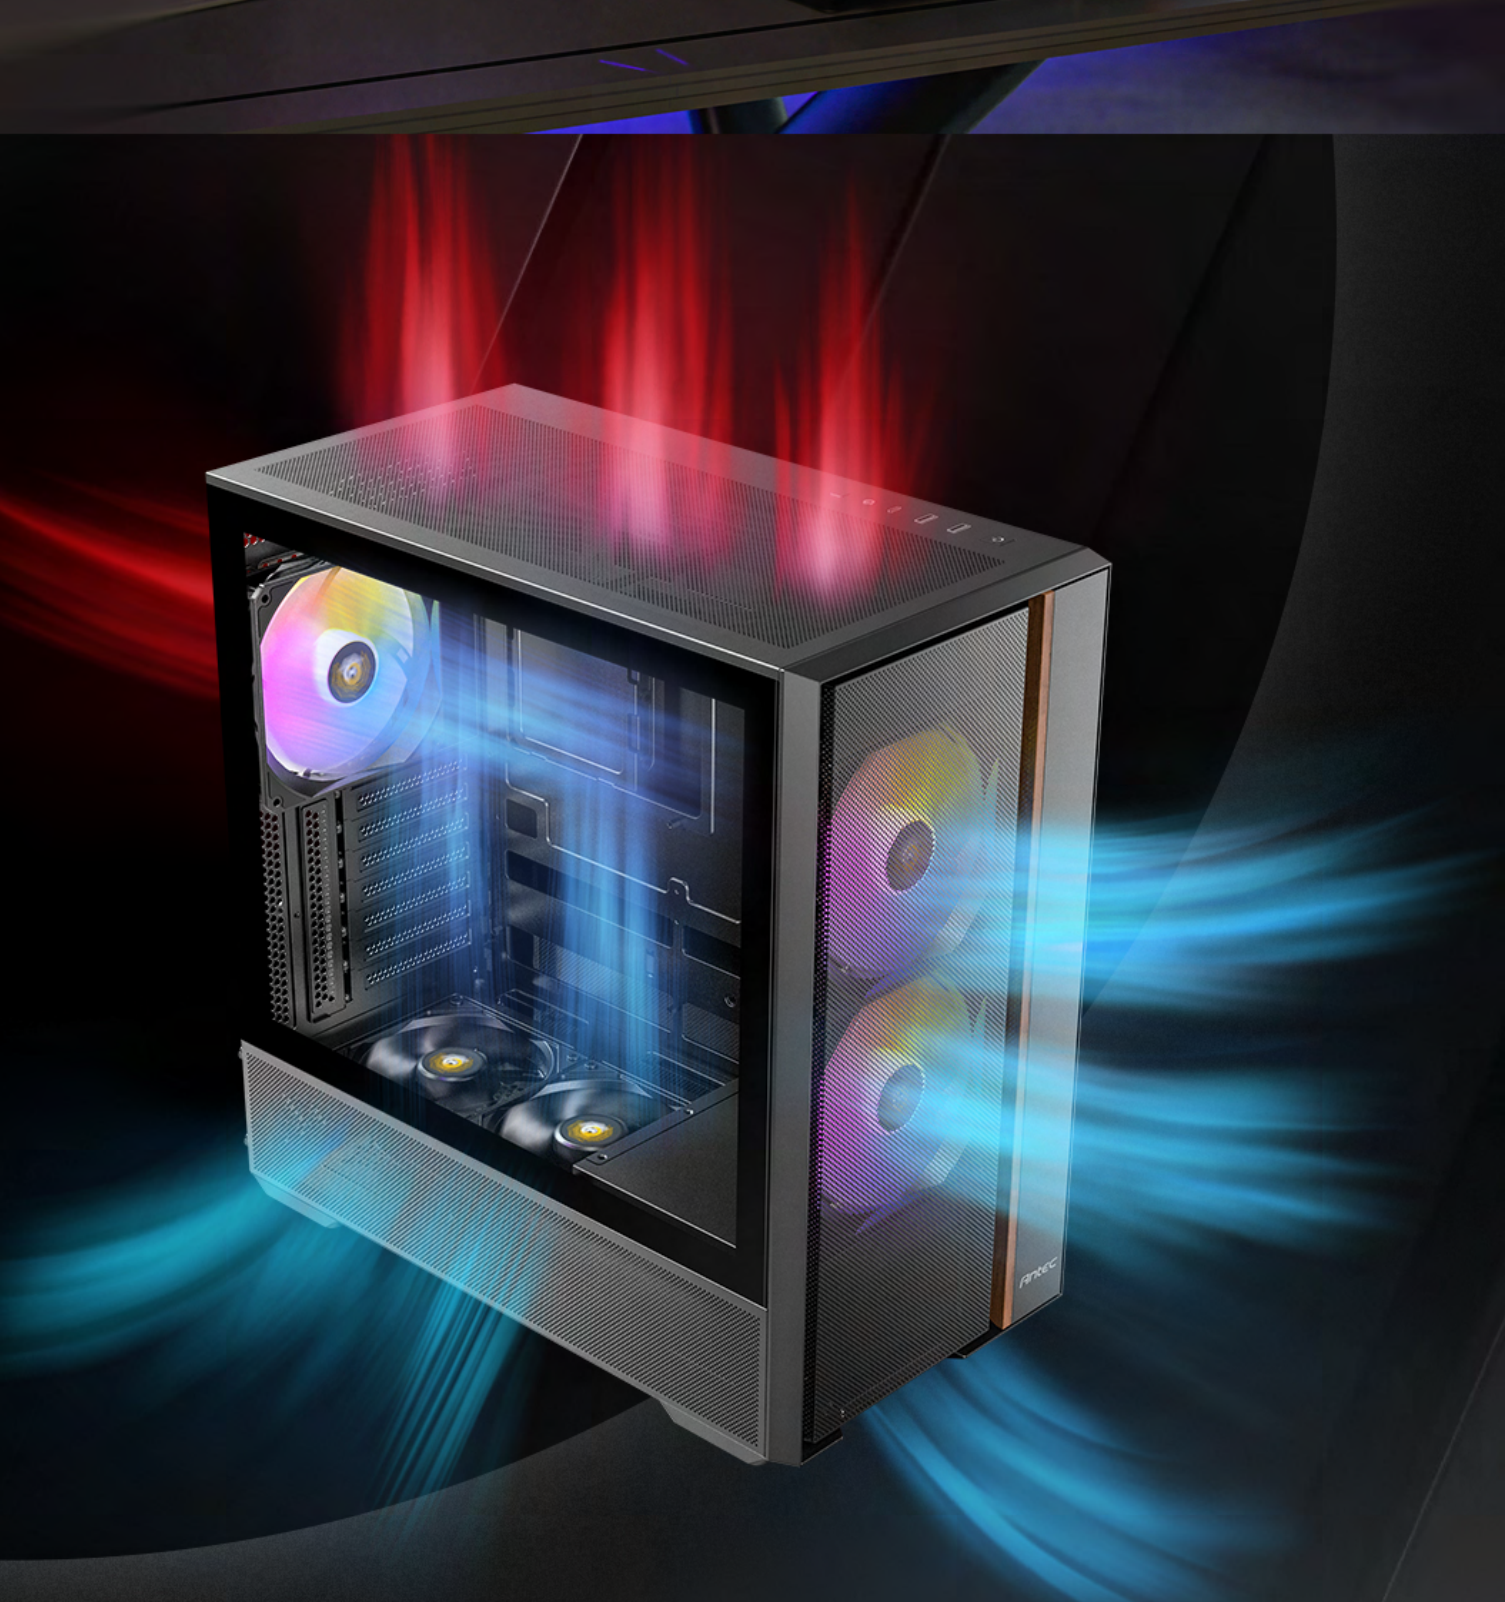

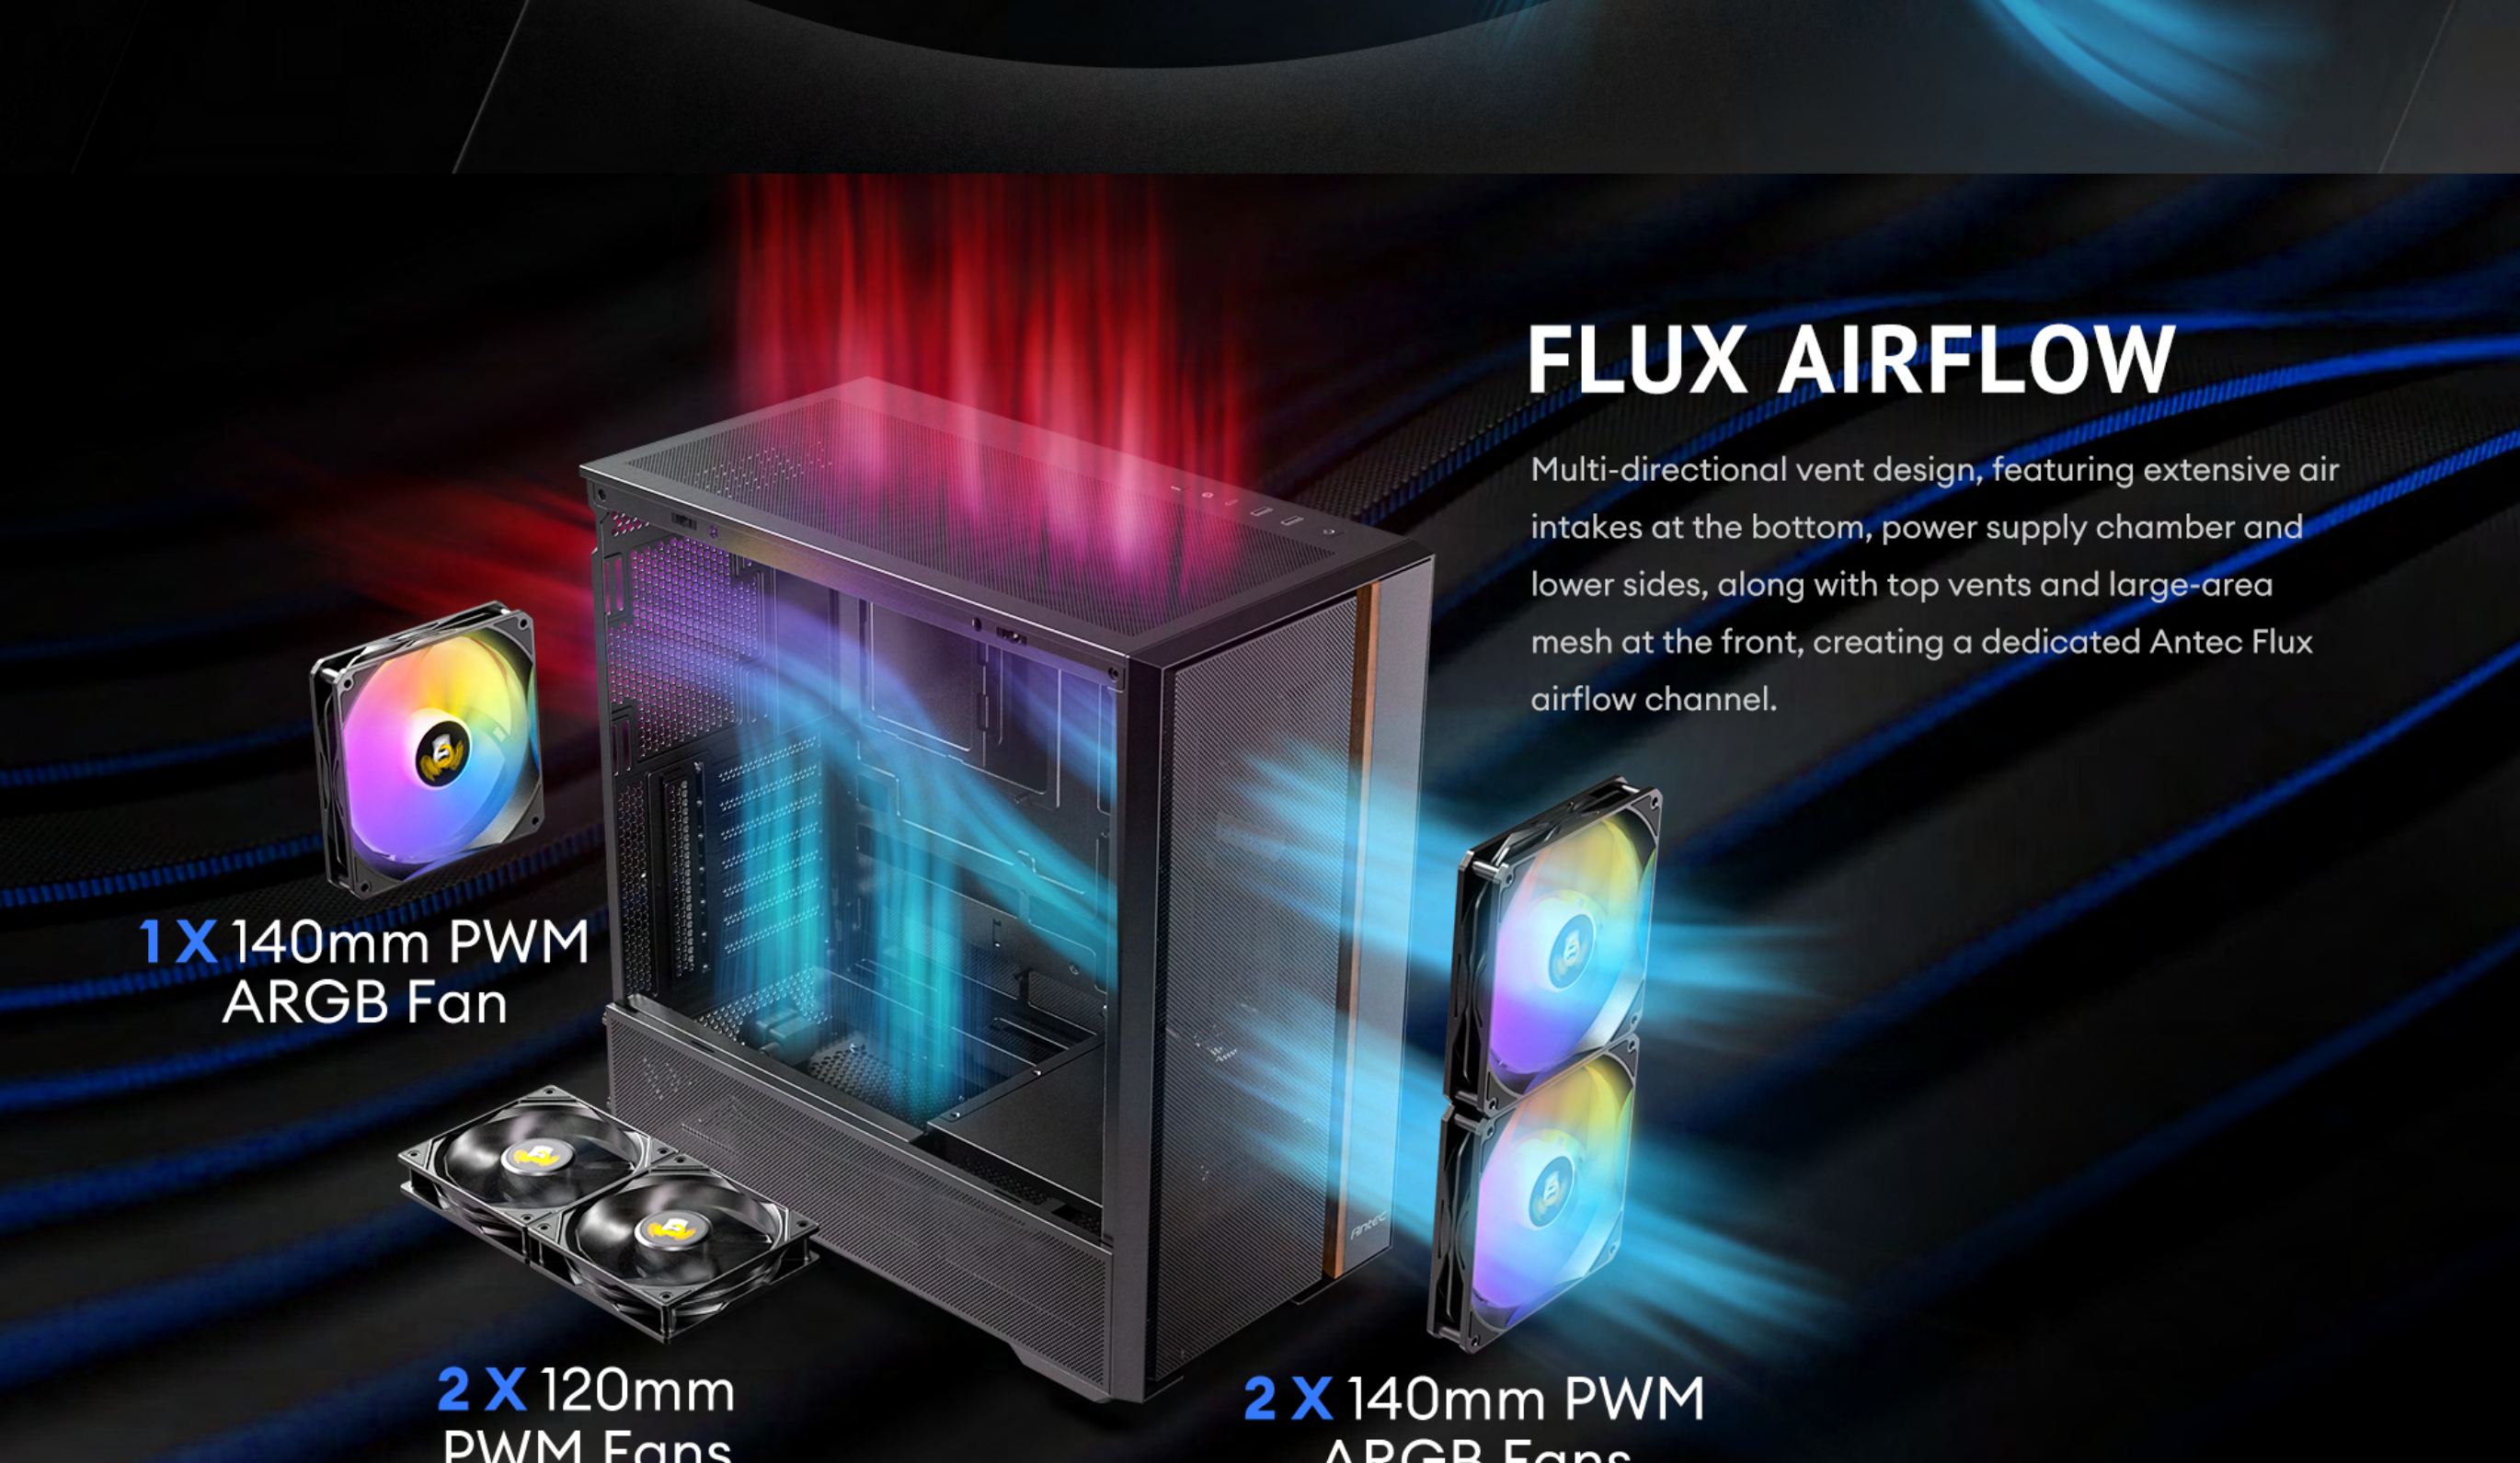
1 X 140mm PWM ARGB Fan
2 X 120mm PWM Fans
Reverse
2 X 140mm PWM ARGB Fans

FLUX AIRFLOW

Multi-directional vent design, featuring extensive air intakes at the bottom, power supply chamber and lower sides, along with top vents and large-area mesh at the front, creating a dedicated Antec Flux airflow channel.

MULTI-DIRECTIONAL VENT DESIGN

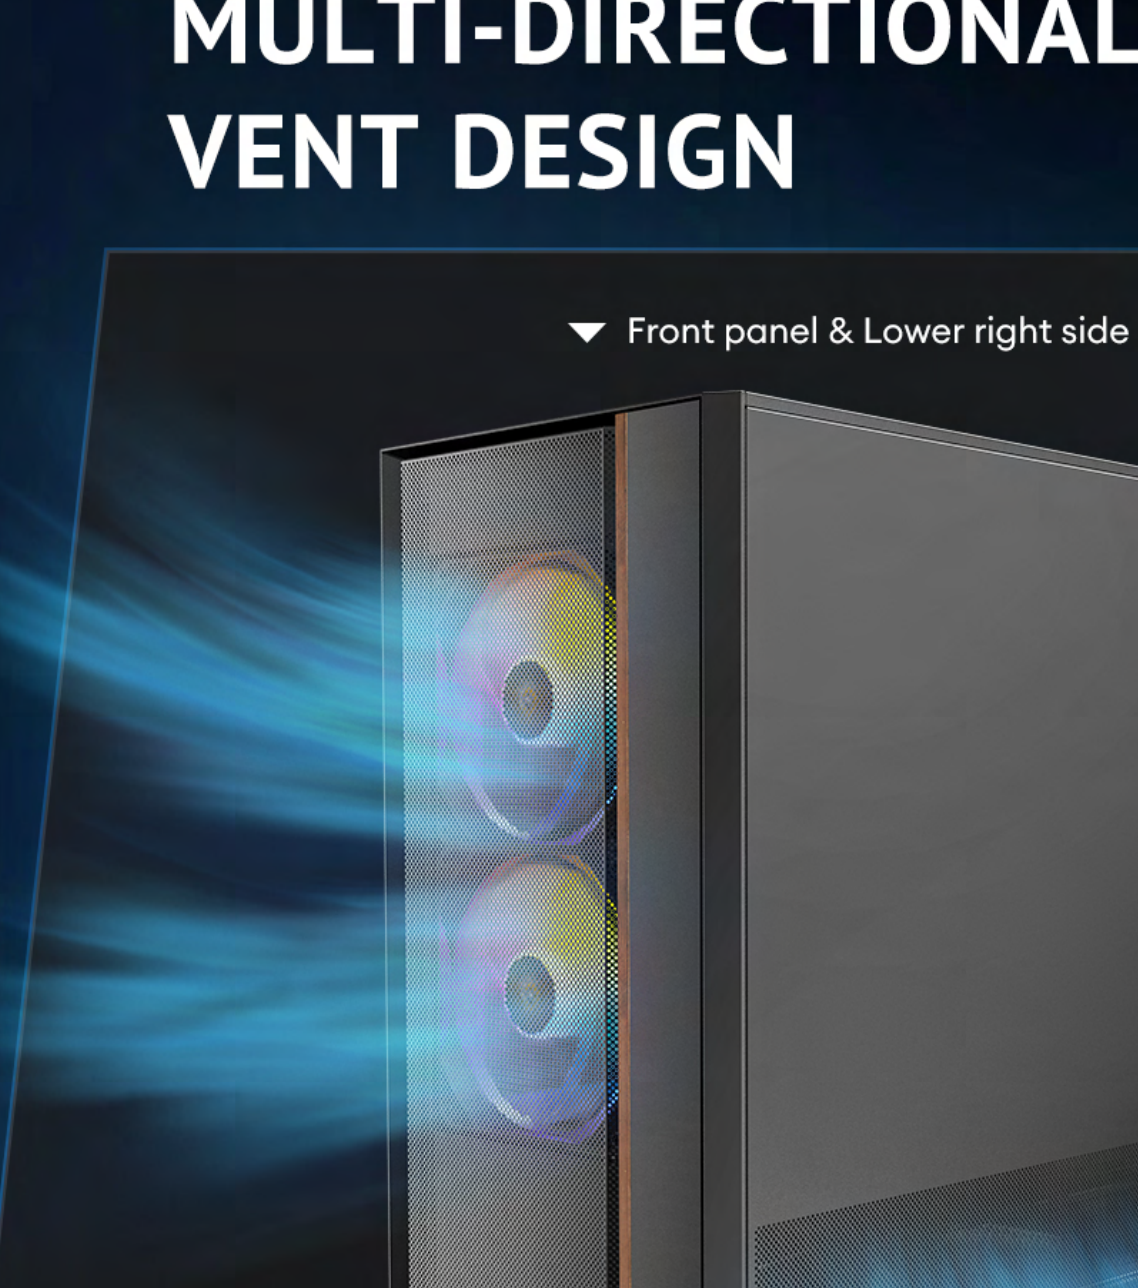
▼ Front panel & Lower right side

▲ Left side of PSU chamber

PRE-INSTALLED 5 X HIGH-PERFORMANCE PWM FANS

3X 140mm PWM ARGB

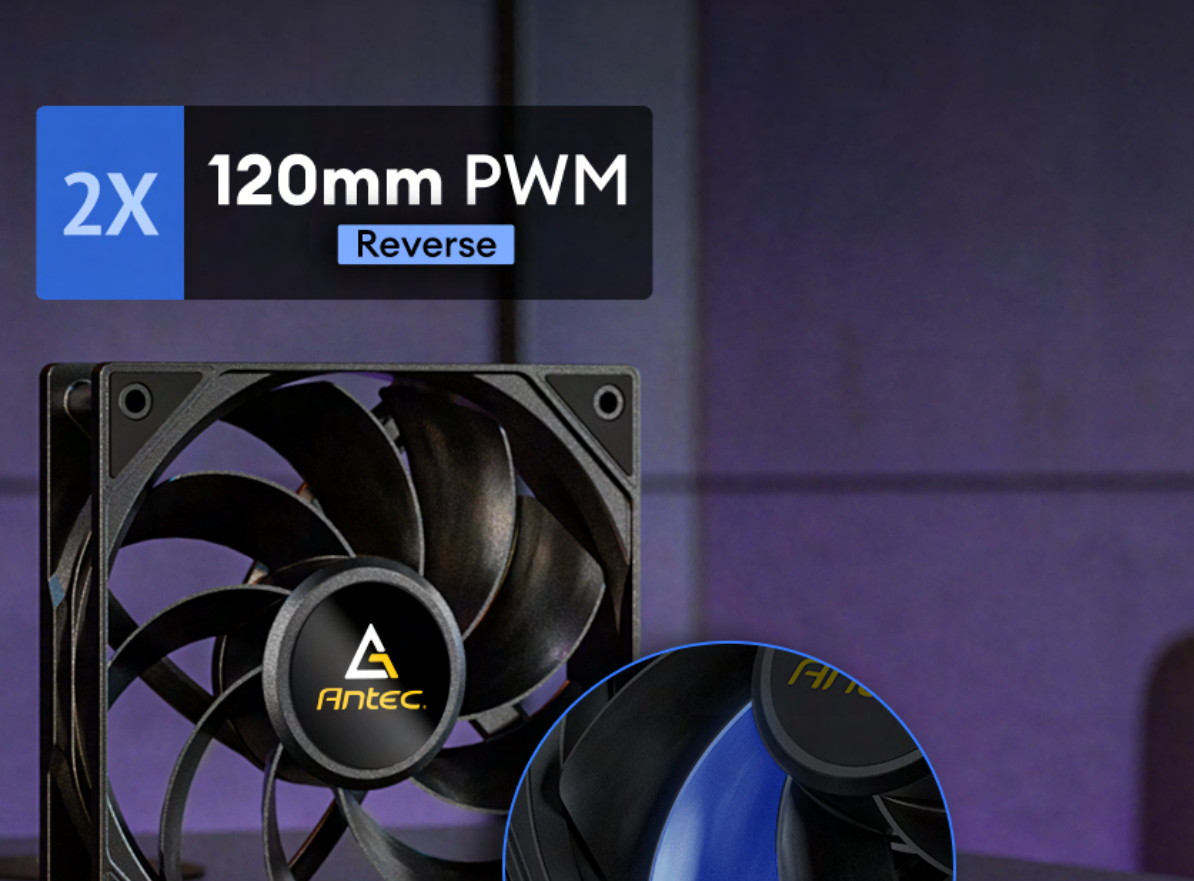
2X 120mm PWM
Reverse

FLUX VERTICAL COOLING

Designed with a front-mounted PSU chamber, this layout opens up space for improved airflow at the bottom of the case, enhancing heat dissipation around the graphics card.

FLUX HORIZONTAL COOLING

Air intake via the front mesh provides a smooth venting channel throughout the case.

OPTIMIZED CHASSIS DESIGN

The recessed front design enhances airflow while minimizing noise for better thermal and acoustic performance.

SUPPORTS 360MM WATER COOLING AT THE TOP

- Supports 140mm rear fan installation with radiator thickness ≤ 55mm.
- Supports 120mm rear fan installation with radiator thickness between 55–70mm.

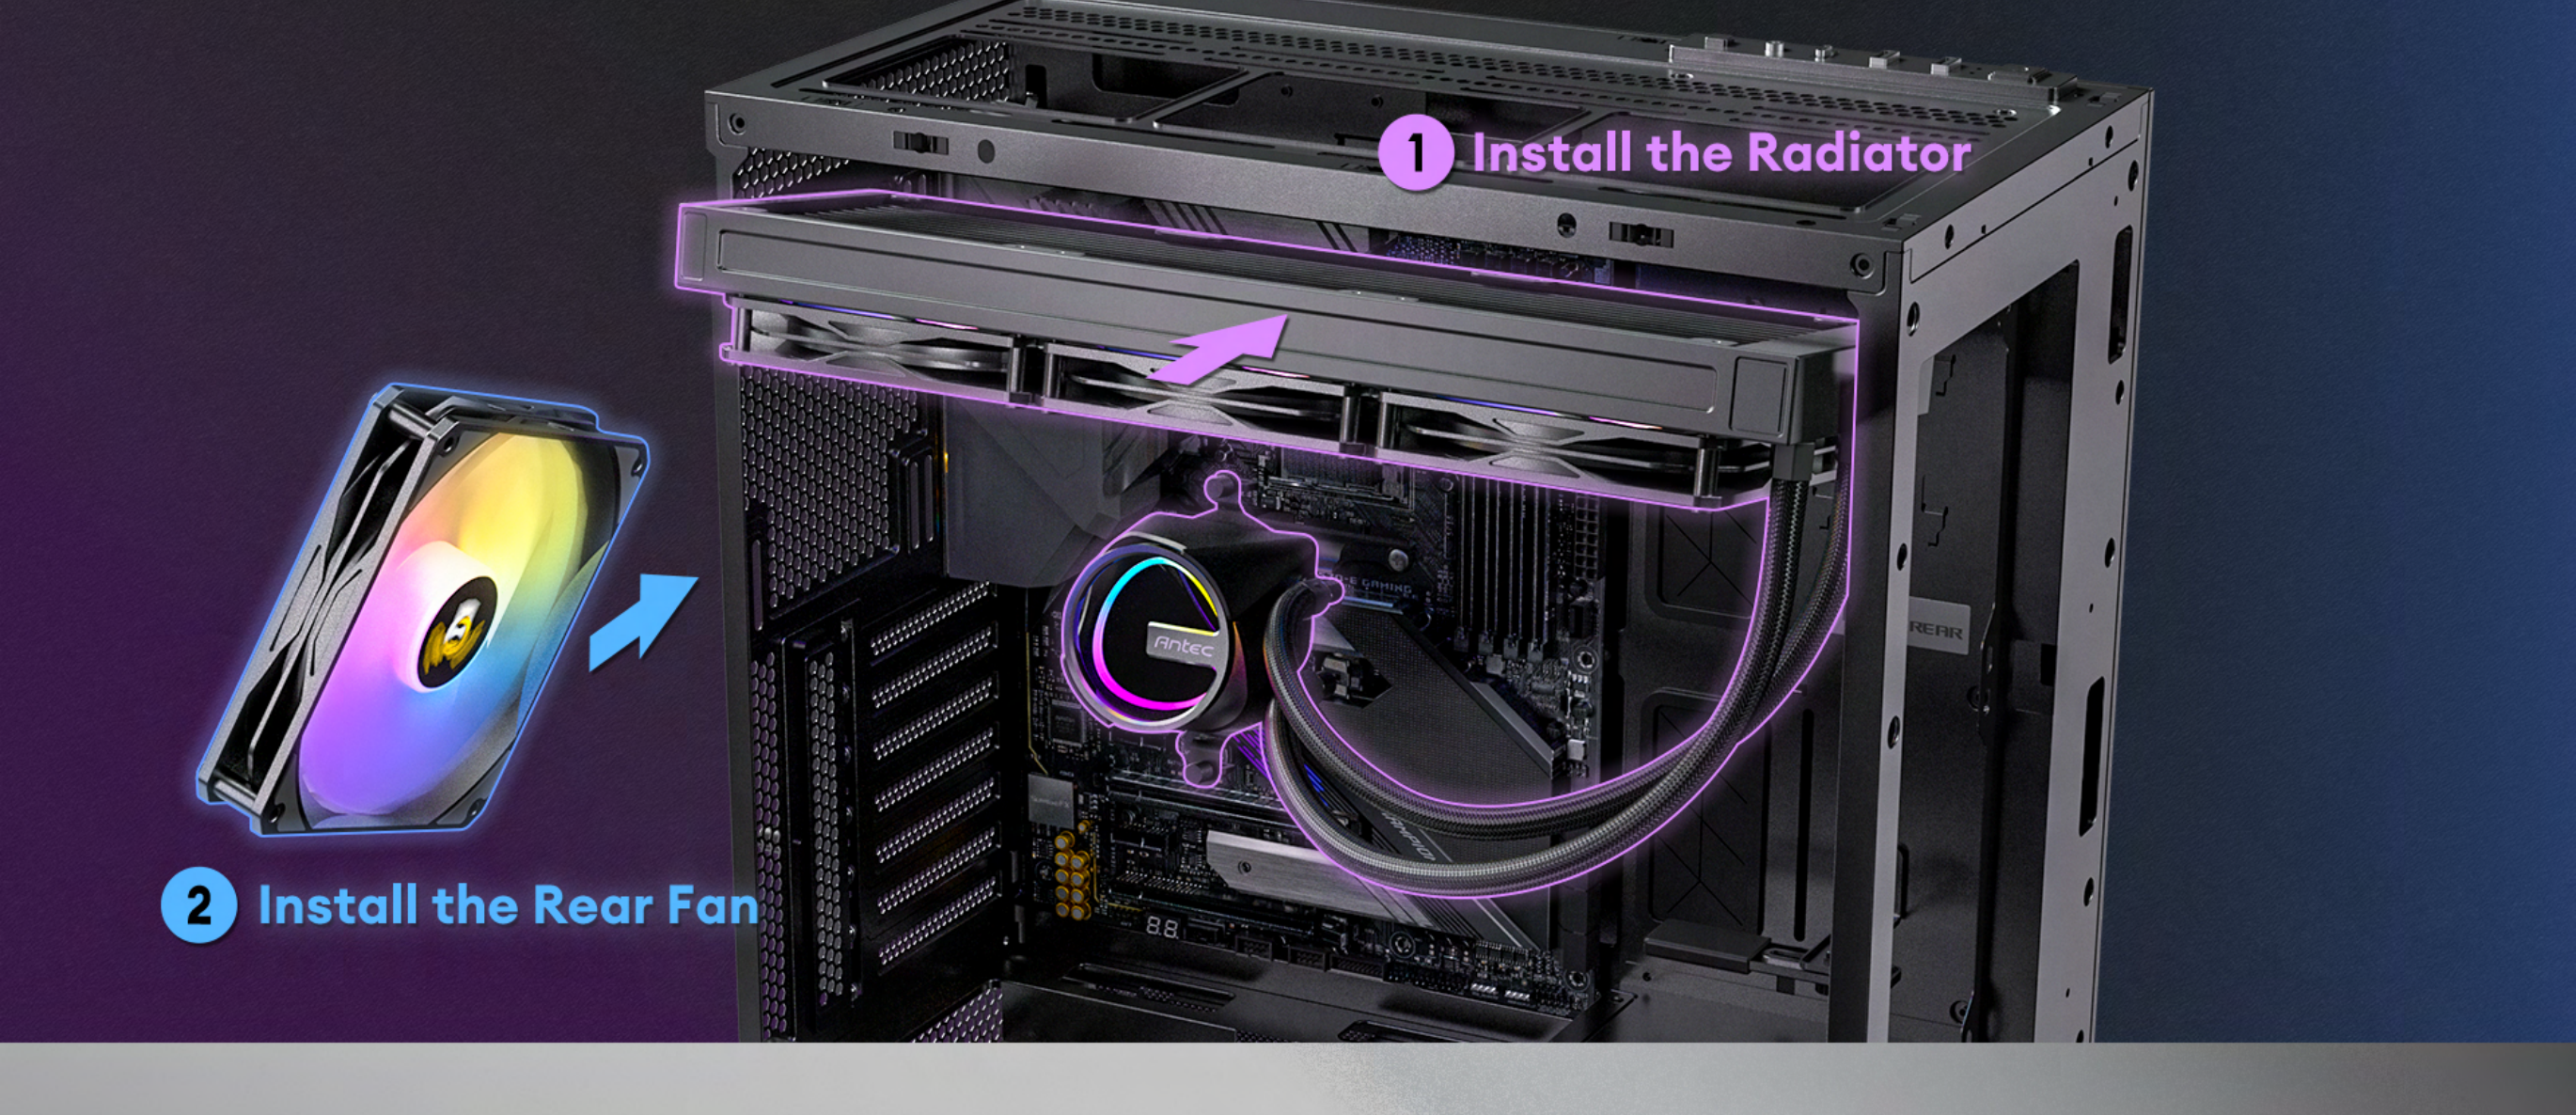
1 Install the Radiator
2 Install the Rear Fan

FAN & RADIATOR SUPPORT

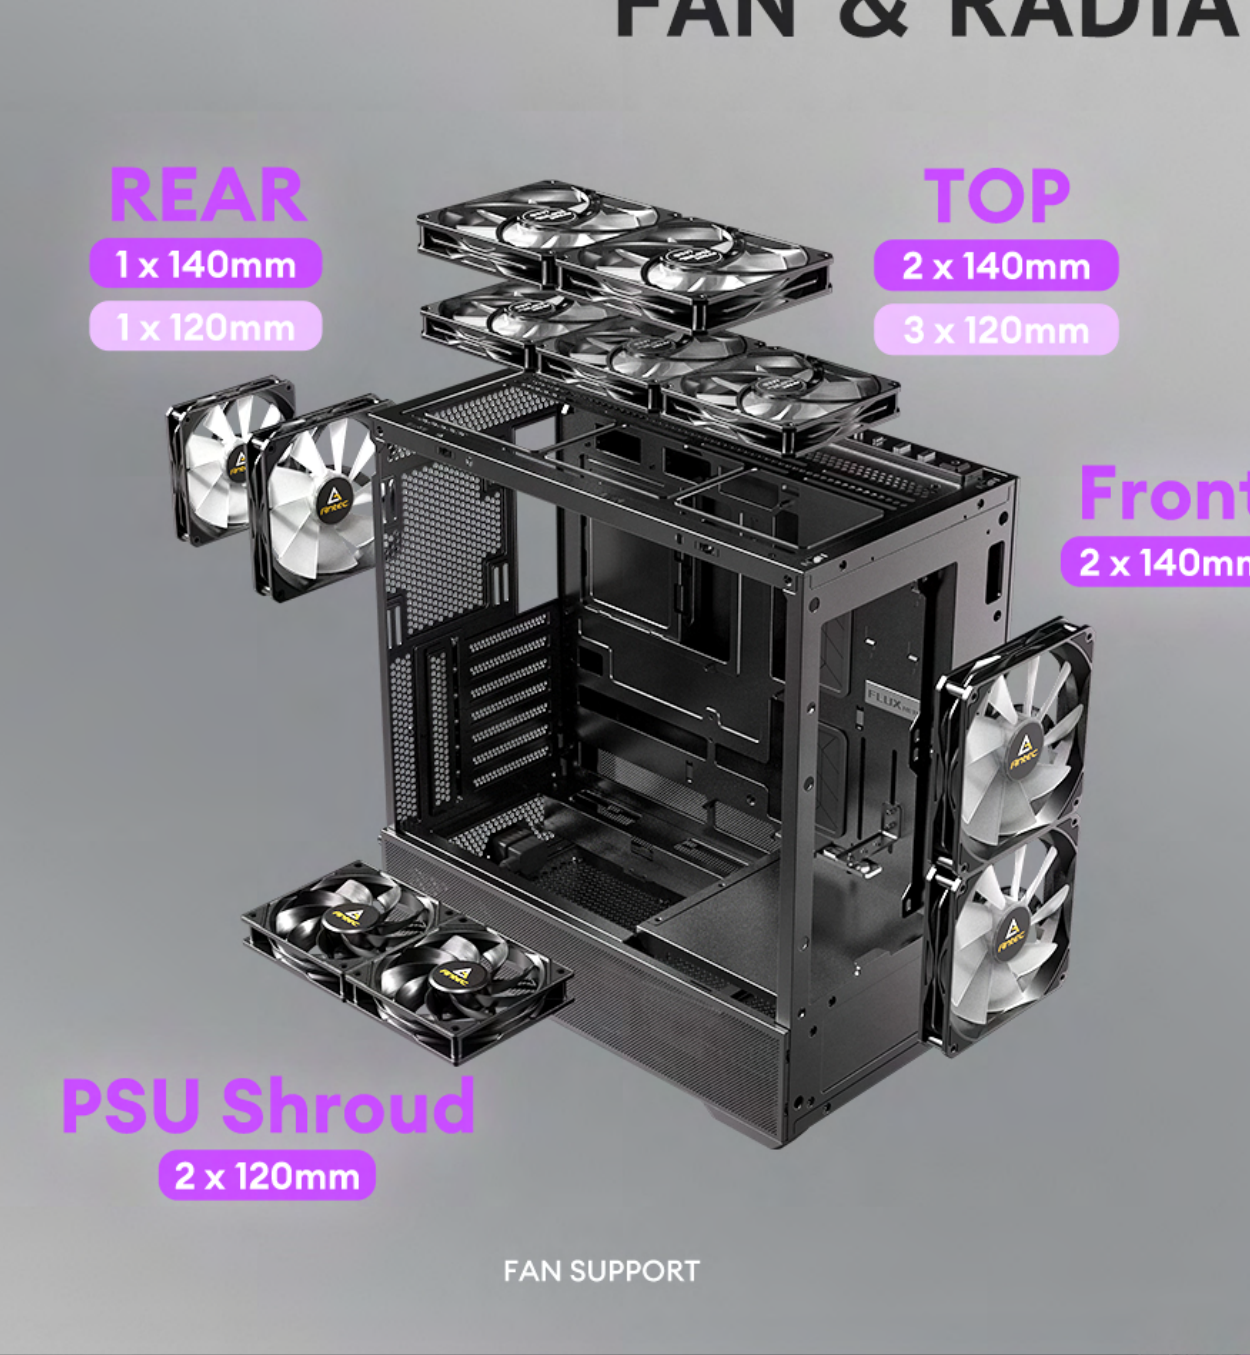
REAR
1 x 140mm
1 x 120mm
TOP
2 x 140mm
3 x 120mm
Front
2 x 140mm
PSU Shroud
2 x 120mm

FAN SUPPORT

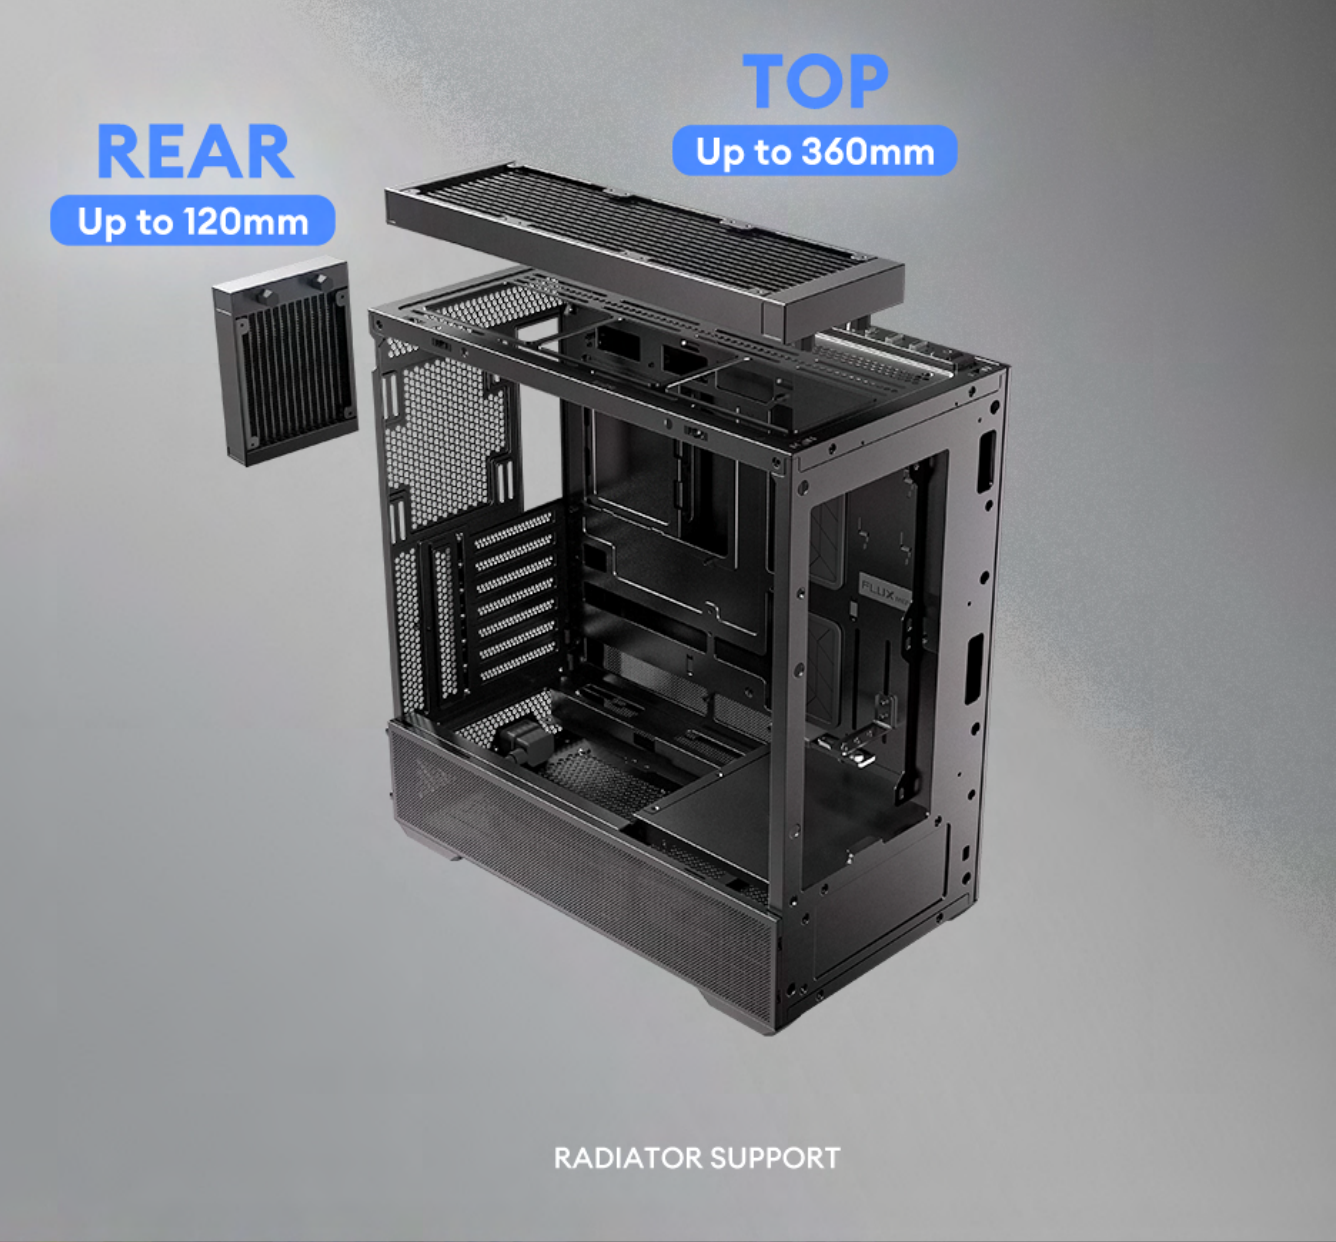
REAR
Up to 120mm
TOP
Up to 360mm

RADIATOR SUPPORT

BOTTOM AIR INTAKE OPTIMIZATION

The front-mounted PSU chamber preserves an open, spacious airflow path at the bottom that is free of hard drives, enabling efficient, direct cooling of the GPU through reverse fans.

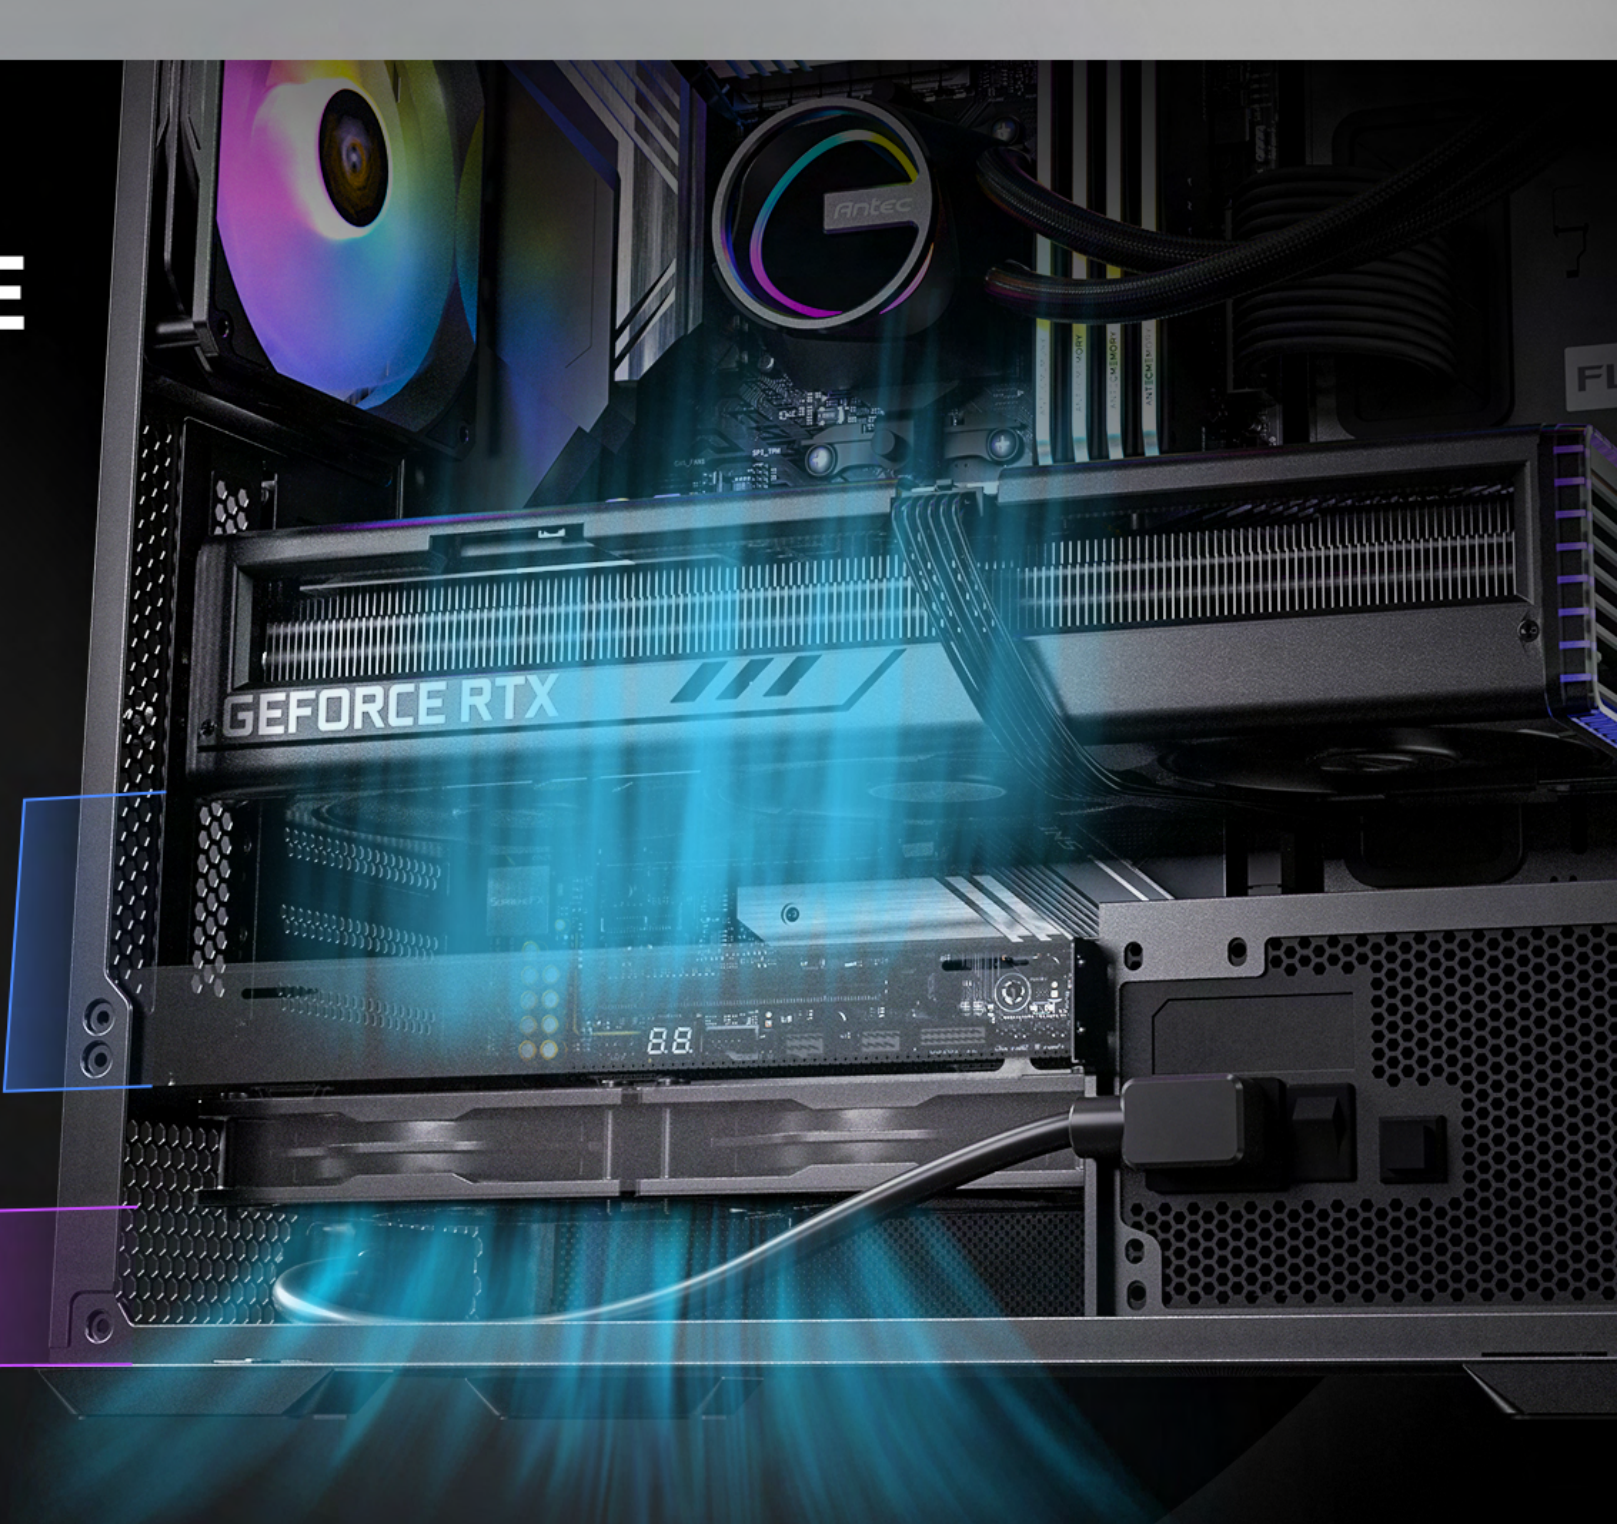
69-102mm
Graphics card space
38mm
Bottom space

PREMIUM WOOD

The front panel is crafted with a combination of metal mesh and premium wood to create a high-quality texture.

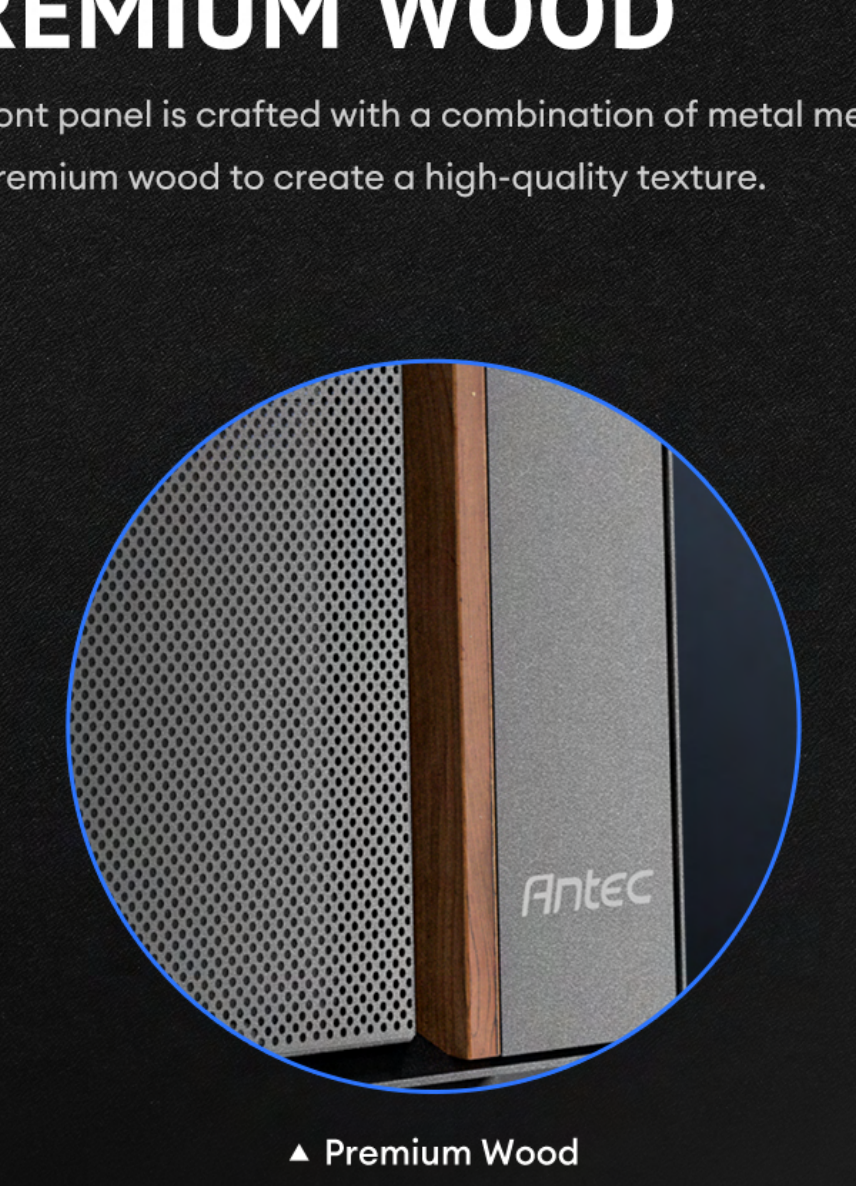

▲ Premium Wood

BUILT-IN GPU BRACKET

Includes a support bracket compatible with high-performance graphics cards.

SUPPORT BACK-CONNECT MOTHERBOARDS

Plug in cables from behind to give front a cleaner look and a smoother airflow channel.

*Supported models:
ASUS TUF B760M-BTF WIFI D4,
ASUS TX GAMING B760-BTF WIFI,
ASUS DIY-APE B760 REVOLUTION,
MSI B760M PROJECT ZERO,
MSI B650M PROJECT ZERO,
Colorful CVN B760M FROZEN WIFI V20,
and more to come.

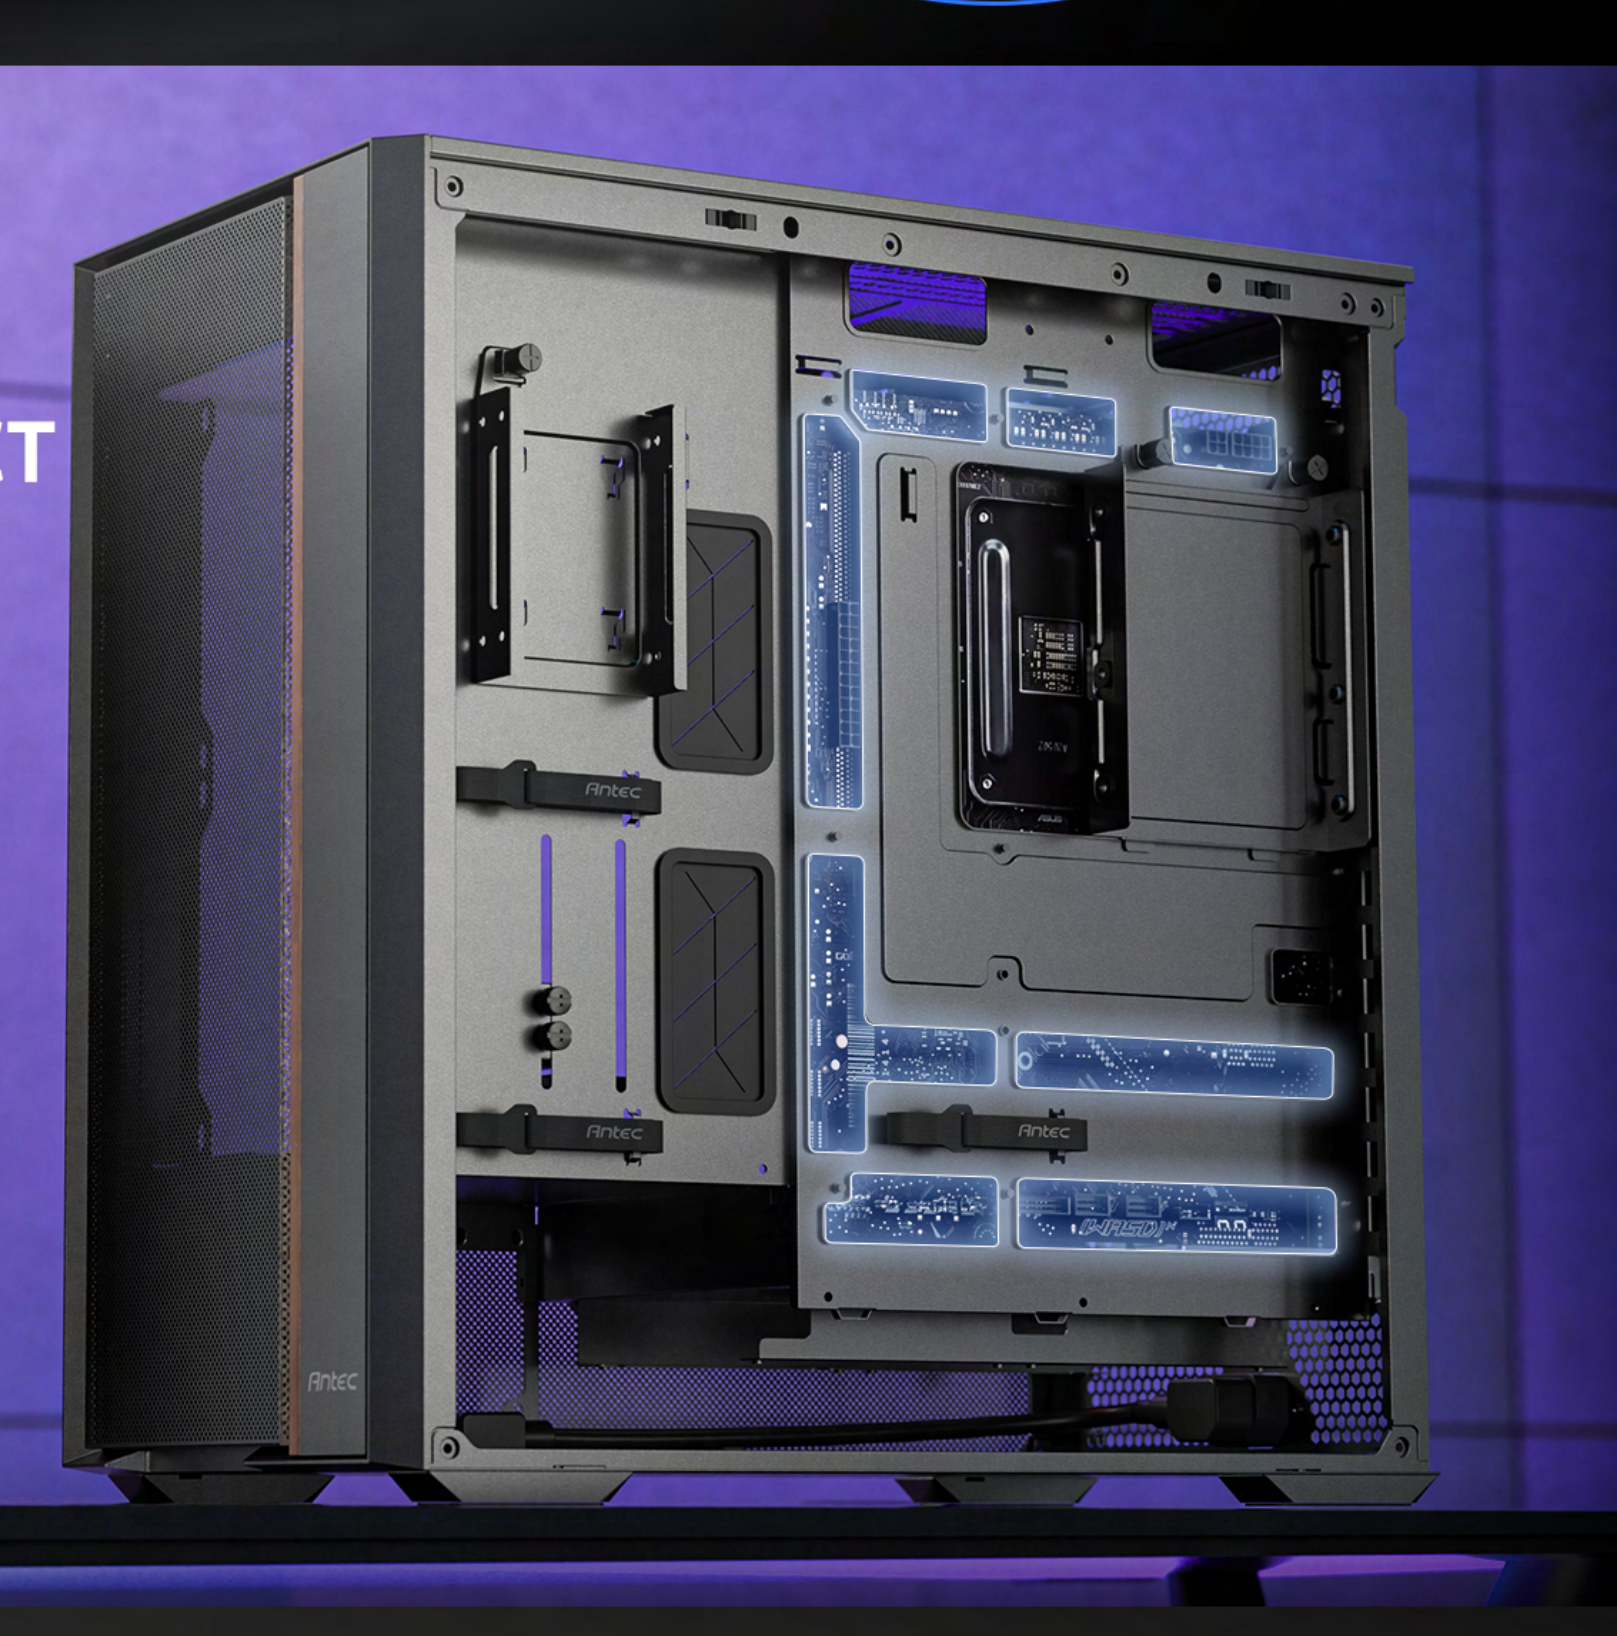

▪ TOP PANEL
▪ LEFT GLASS & LEFT METAL PANEL

TOOL-FREE PANEL DESIGN

▪ FRONT PANEL
▪ RIGHT METAL PANEL

FRONT-MOUNTED PSU CHAMBER & 13A EXTENSION CABLE

The front-mounted PSU chamber improves airflow by freeing up internal space, while the included 13A extension cable ensures stable power delivery for high-wattage PSUs.

POWER EXTENSION CABLE SETUP

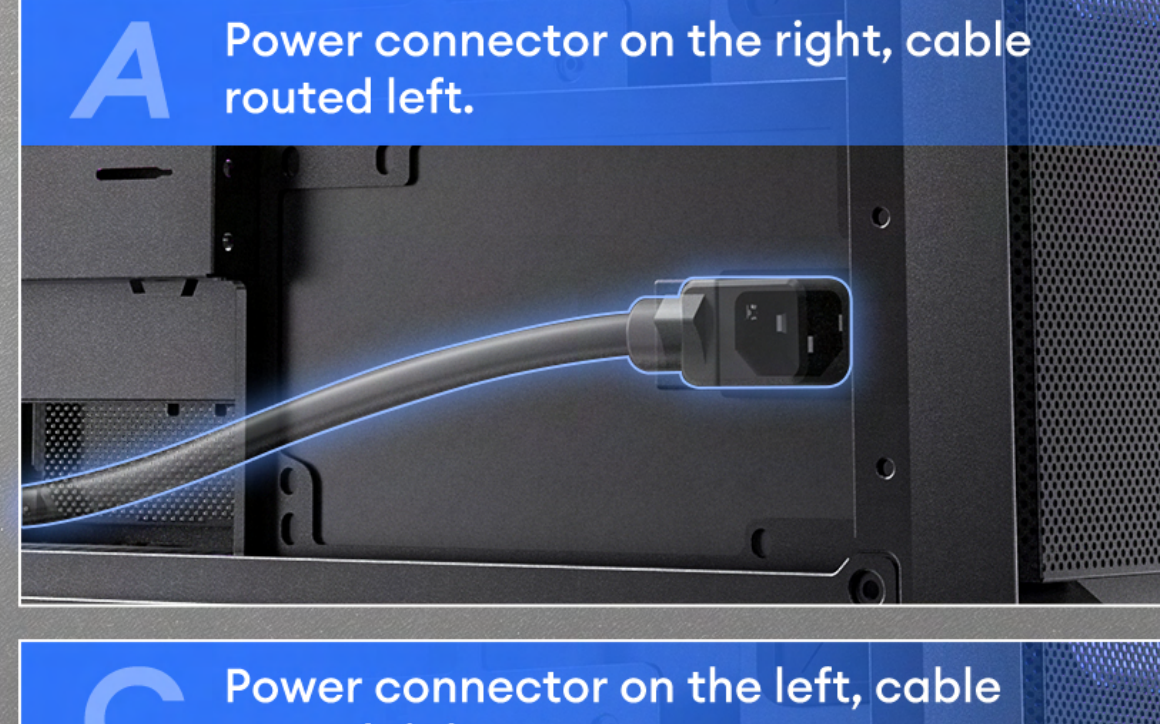
A Power connector on the right, cable routed left.

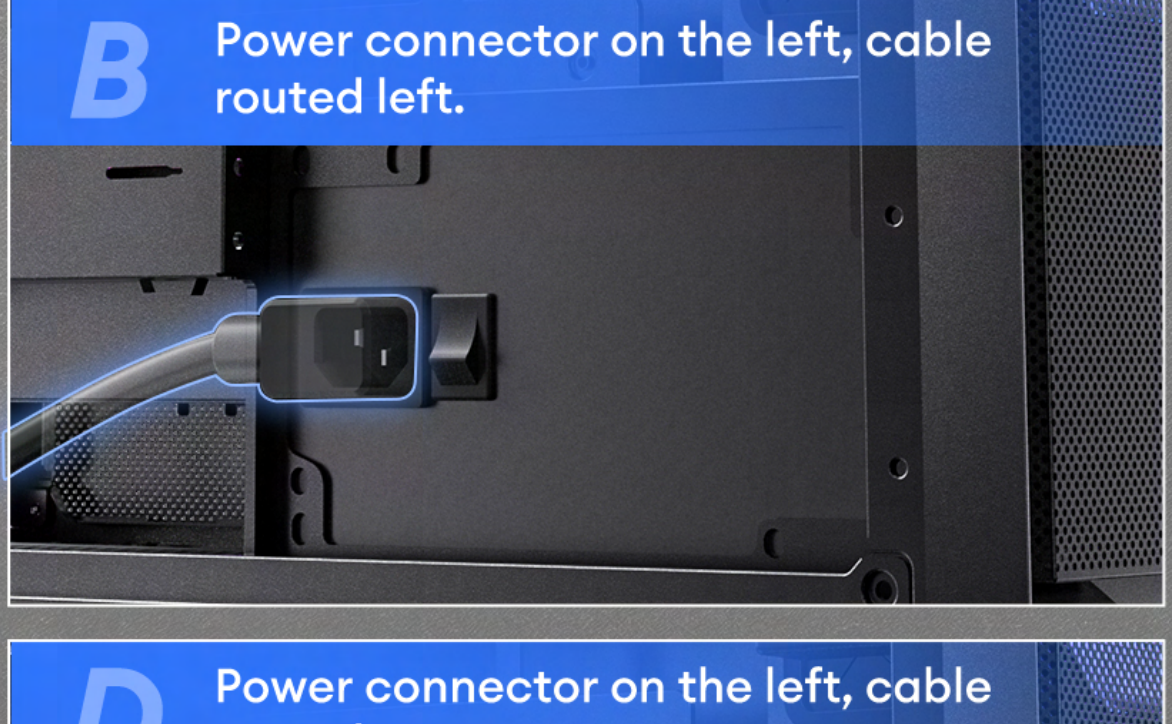
B Power connector on the left, cable routed left.

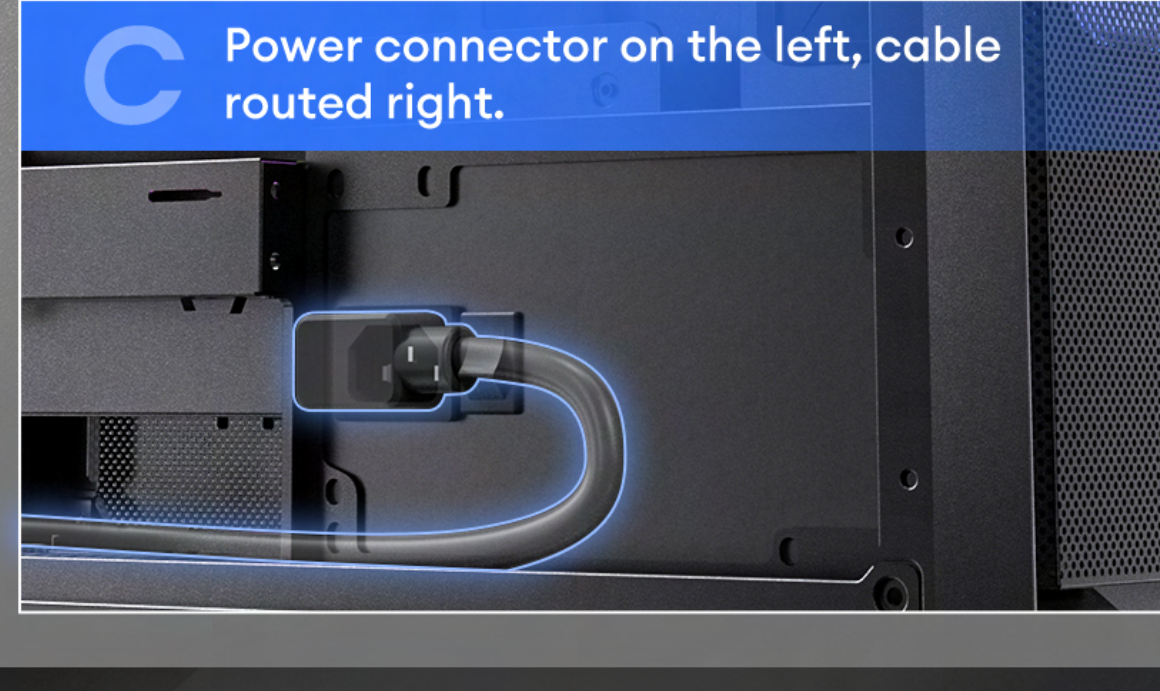
C Power connector on the left, cable routed right.

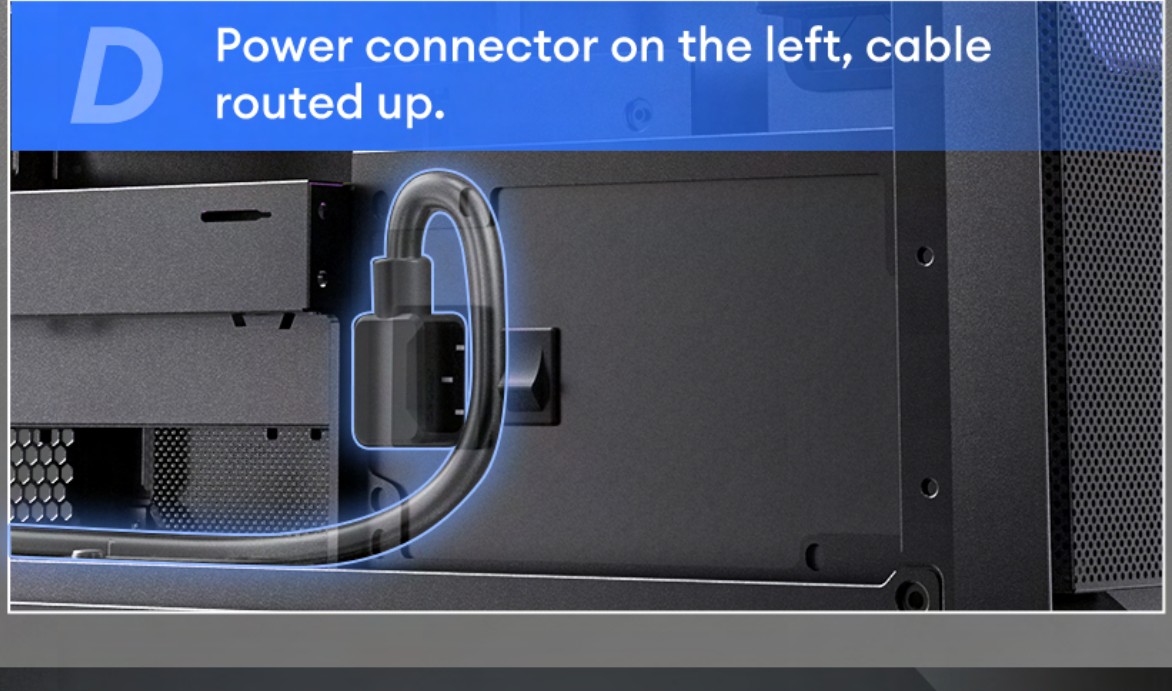
D Power connector on the left, cable routed up.

CABLE MANAGEMENT

Equipped with grommets and Velcro straps for easy, secure cable management, enhancing airflow and creating a cleaner look.

Space depth :
37mm
Space depth :
33mm

FLUX REAR

Mid Tower Case

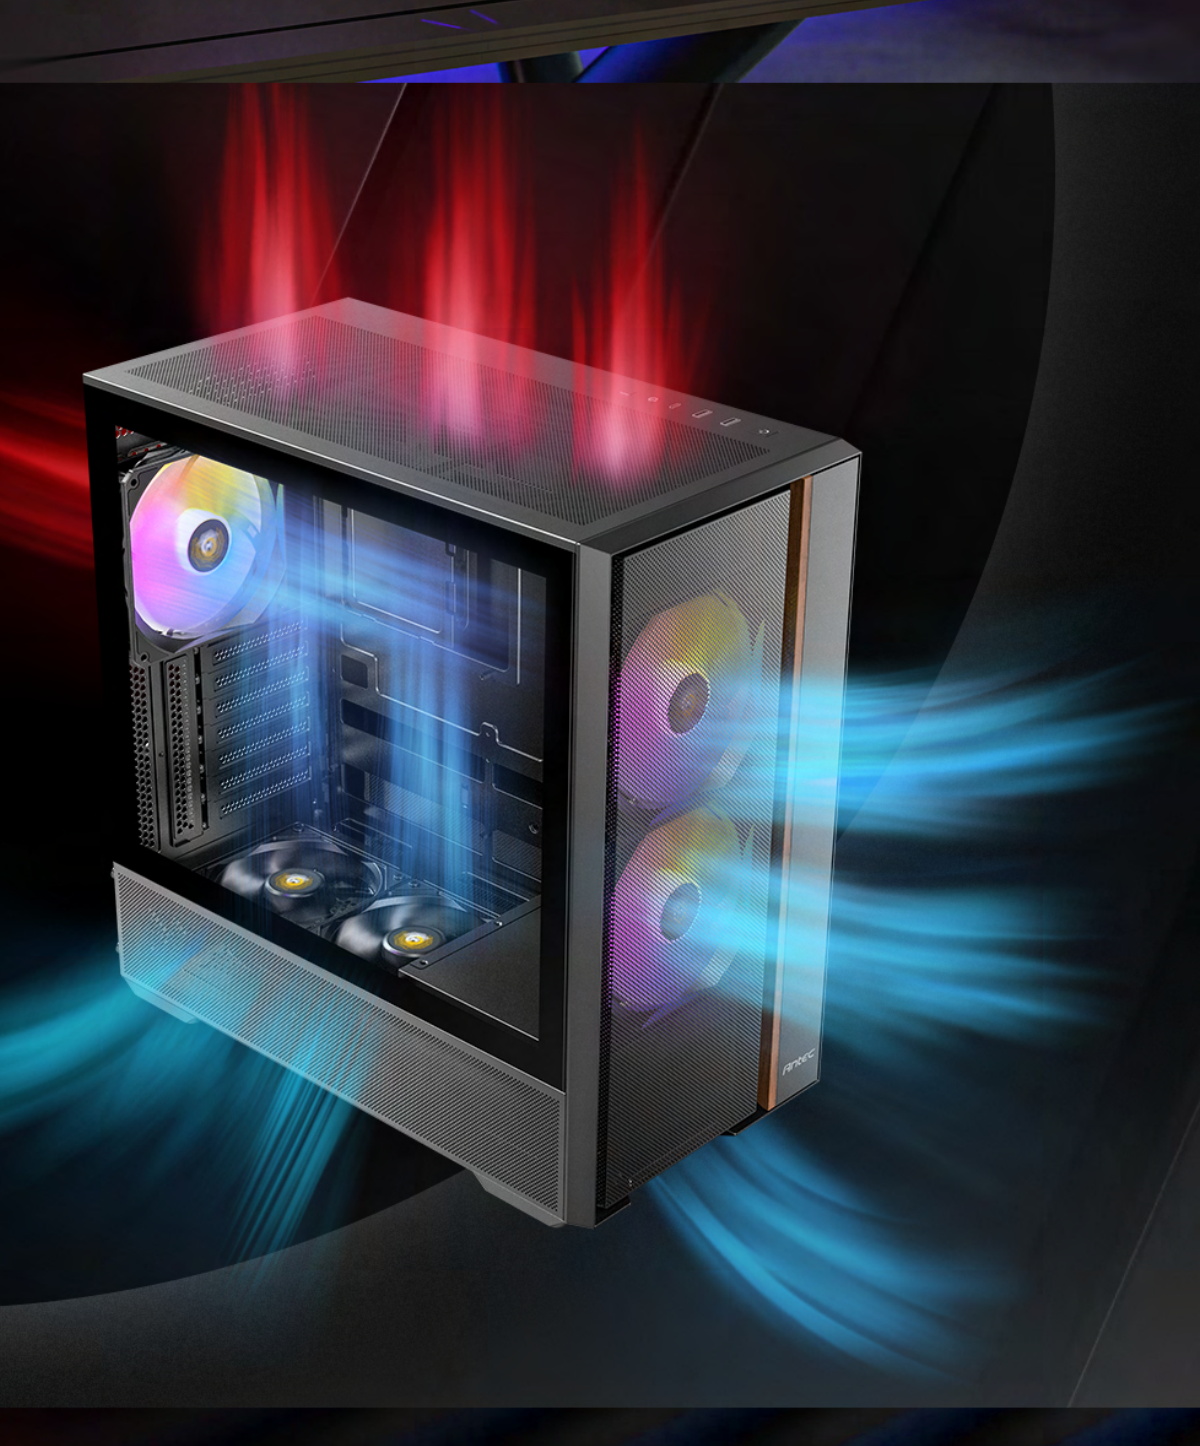

FLOW LUXURY

F-LUX Platform, abbreviation of Flow Luxury, features ultra case structure design for excellent airflow and 5 fans included, delivering enhanced GPU cooling performance.

- FLUX Platform Patent Number: 11259440

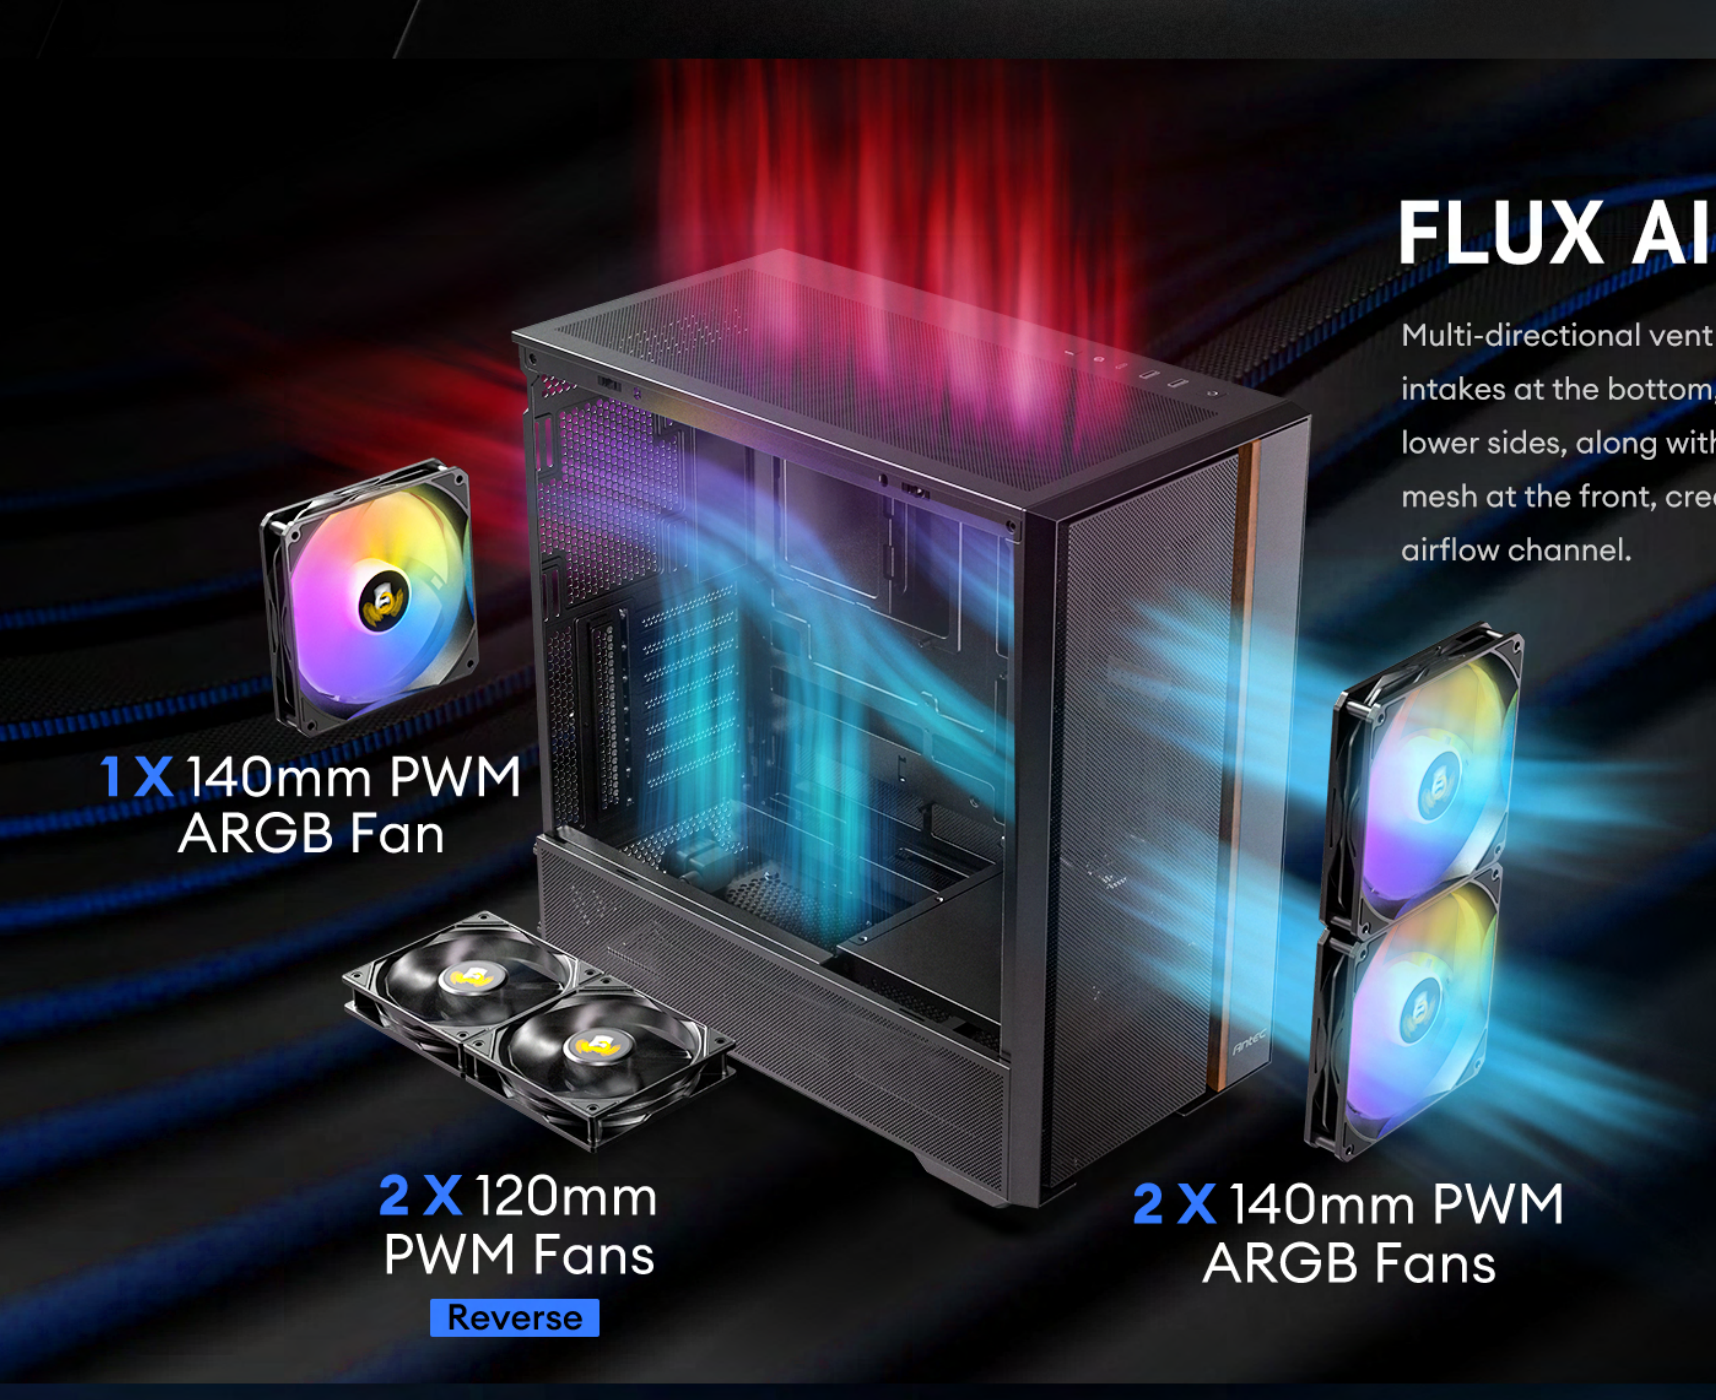
1 X 140mm PWM ARGB Fan
2 X 120mm PWM Fans
Reverse
2 X 140mm PWM ARGB Fans

FLUX AIRFLOW

Multi-directional vent design, featuring extensive air intakes at the bottom, power supply chamber and lower sides, along with top vents and large-area mesh at the front, creating a dedicated Antec Flux airflow channel.

MULTI-DIRECTIONAL VENT DESIGN

▼ Front panel & Lower right side

▲ Left side of PSU chamber

▼ Top panel

▲ Bottom

PRE-INSTALLED 5 X HIGH-PERFORMANCE PWM FANS

3X
140mm PWM ARGB

2X
120mm PWM
Reverse

FLUX VERTICAL COOLING

Designed with a front-mounted PSU chamber, this layout opens up space for improved airflow at the bottom of the case, enhancing heat dissipation around the graphics card.

FLUX HORIZONTAL COOLING

Air intake via the front mesh provides a smooth venting channel throughout the case.

OPTIMIZED CHASSIS DESIGN

The recessed front design enhances airflow while minimizing noise for better thermal and acoustic performance.

SUPPORTS 360MM WATER COOLING AT THE TOP

- Supports 140mm rear fan installation with radiator thickness ≤ 55mm.
- Supports 120mm rear fan installation with radiator thickness between 55–70mm.

① Install the Radiator
② Install the Rear Fan

FAN & RADIATOR SUPPORT

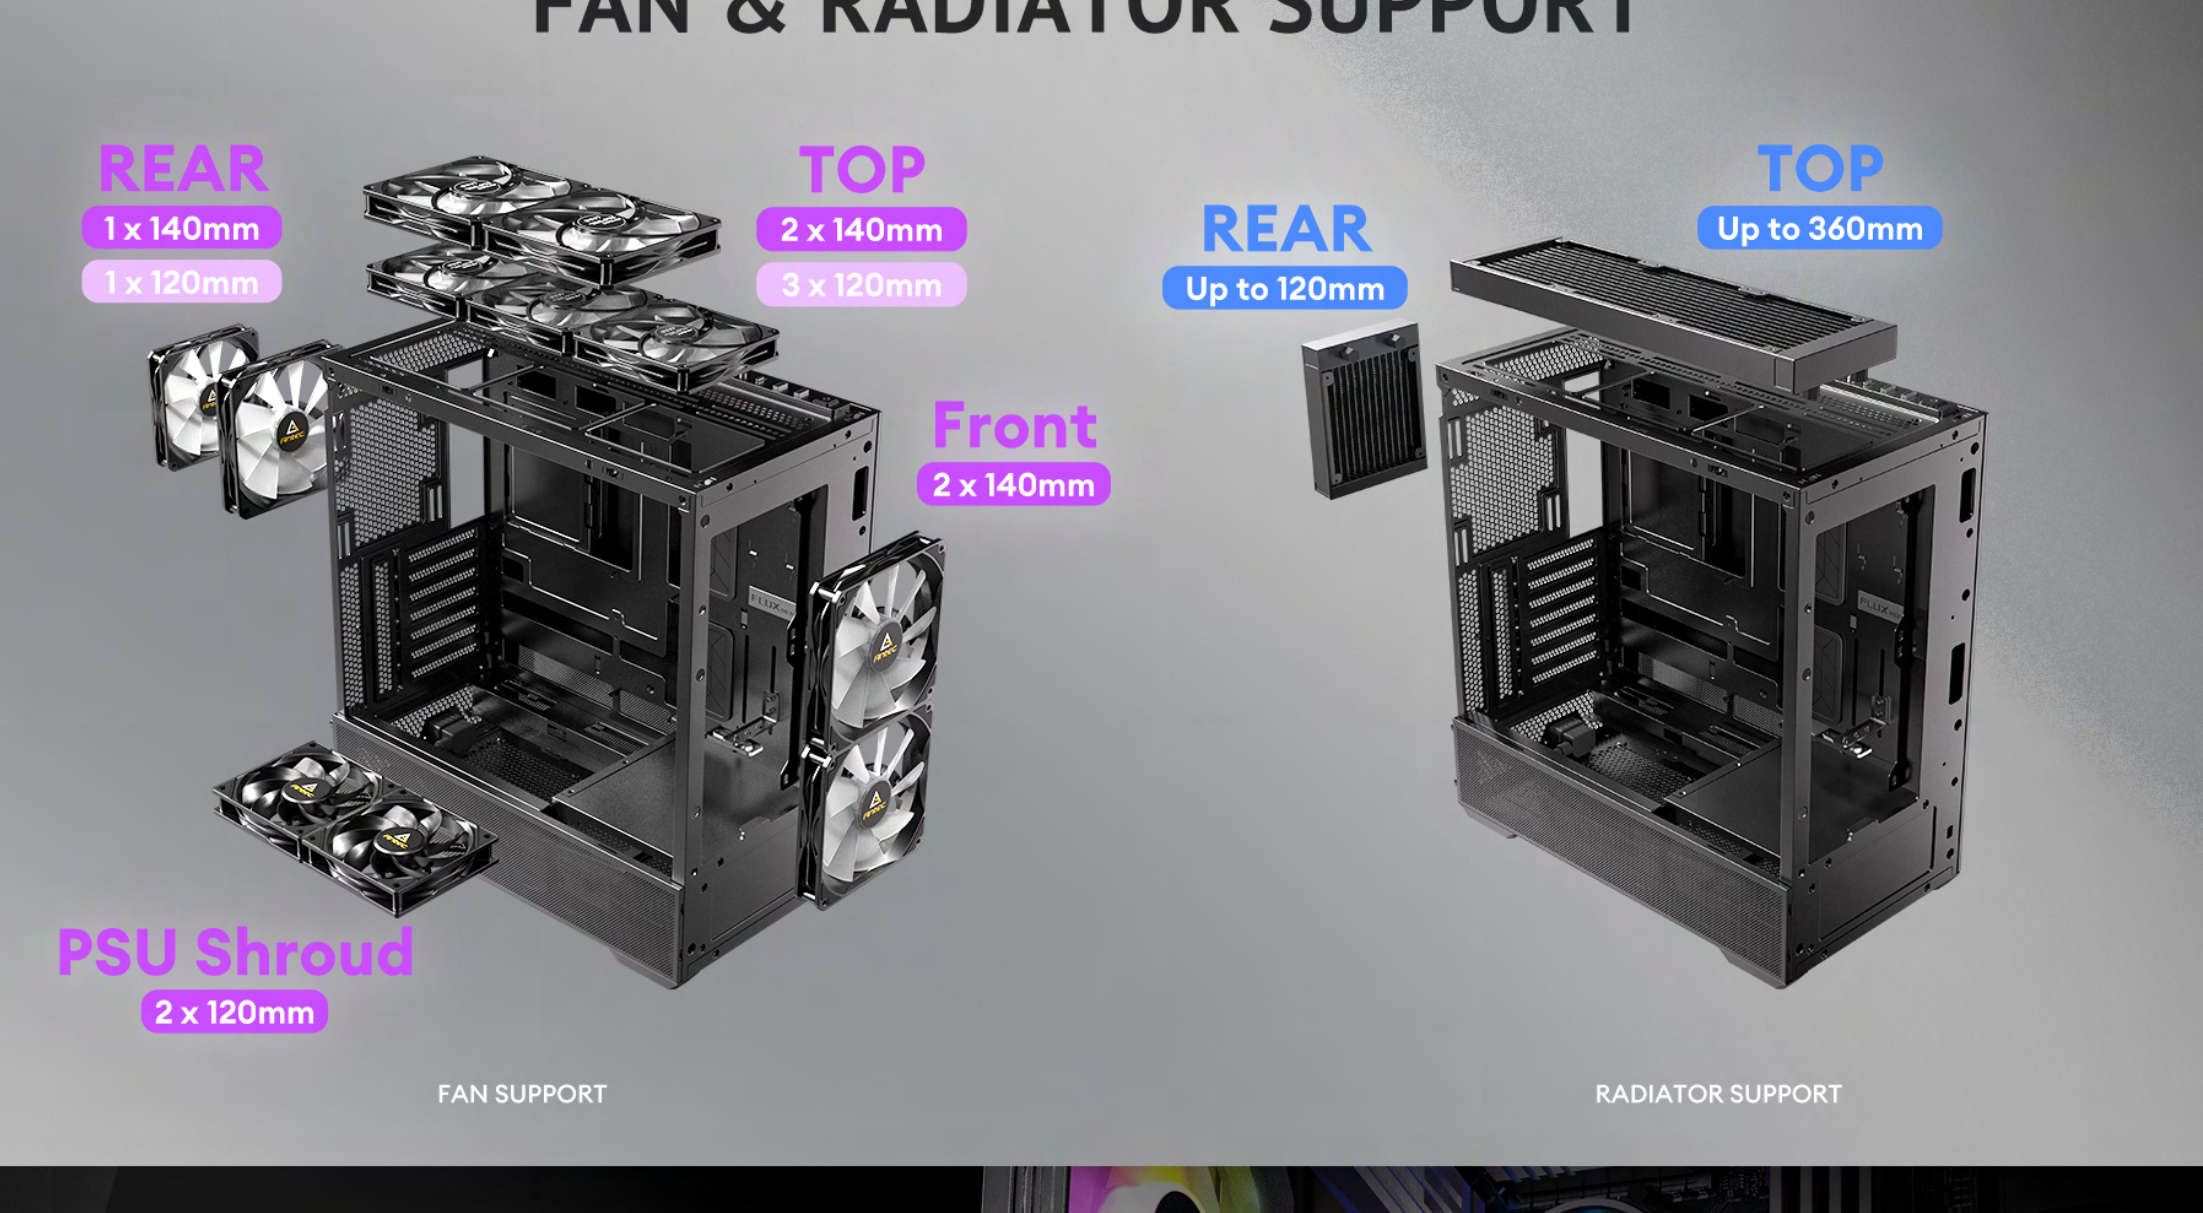
REAR
1 x 140mm
1 x 120mm
TOP
2 x 140mm
3 x 120mm
Front
2 x 140mm
PSU Shroud
2 x 120mm
FAN SUPPORT
REAR
Up to 120mm
TOP
Up to 360mm
RADIATOR SUPPORT

BOTTOM AIR INTAKE OPTIMIZATION

The front-mounted PSU chamber preserves an open, spacious airflow path at the bottom that is free of hard drives, enabling efficient, direct cooling of the GPU through reverse fans.

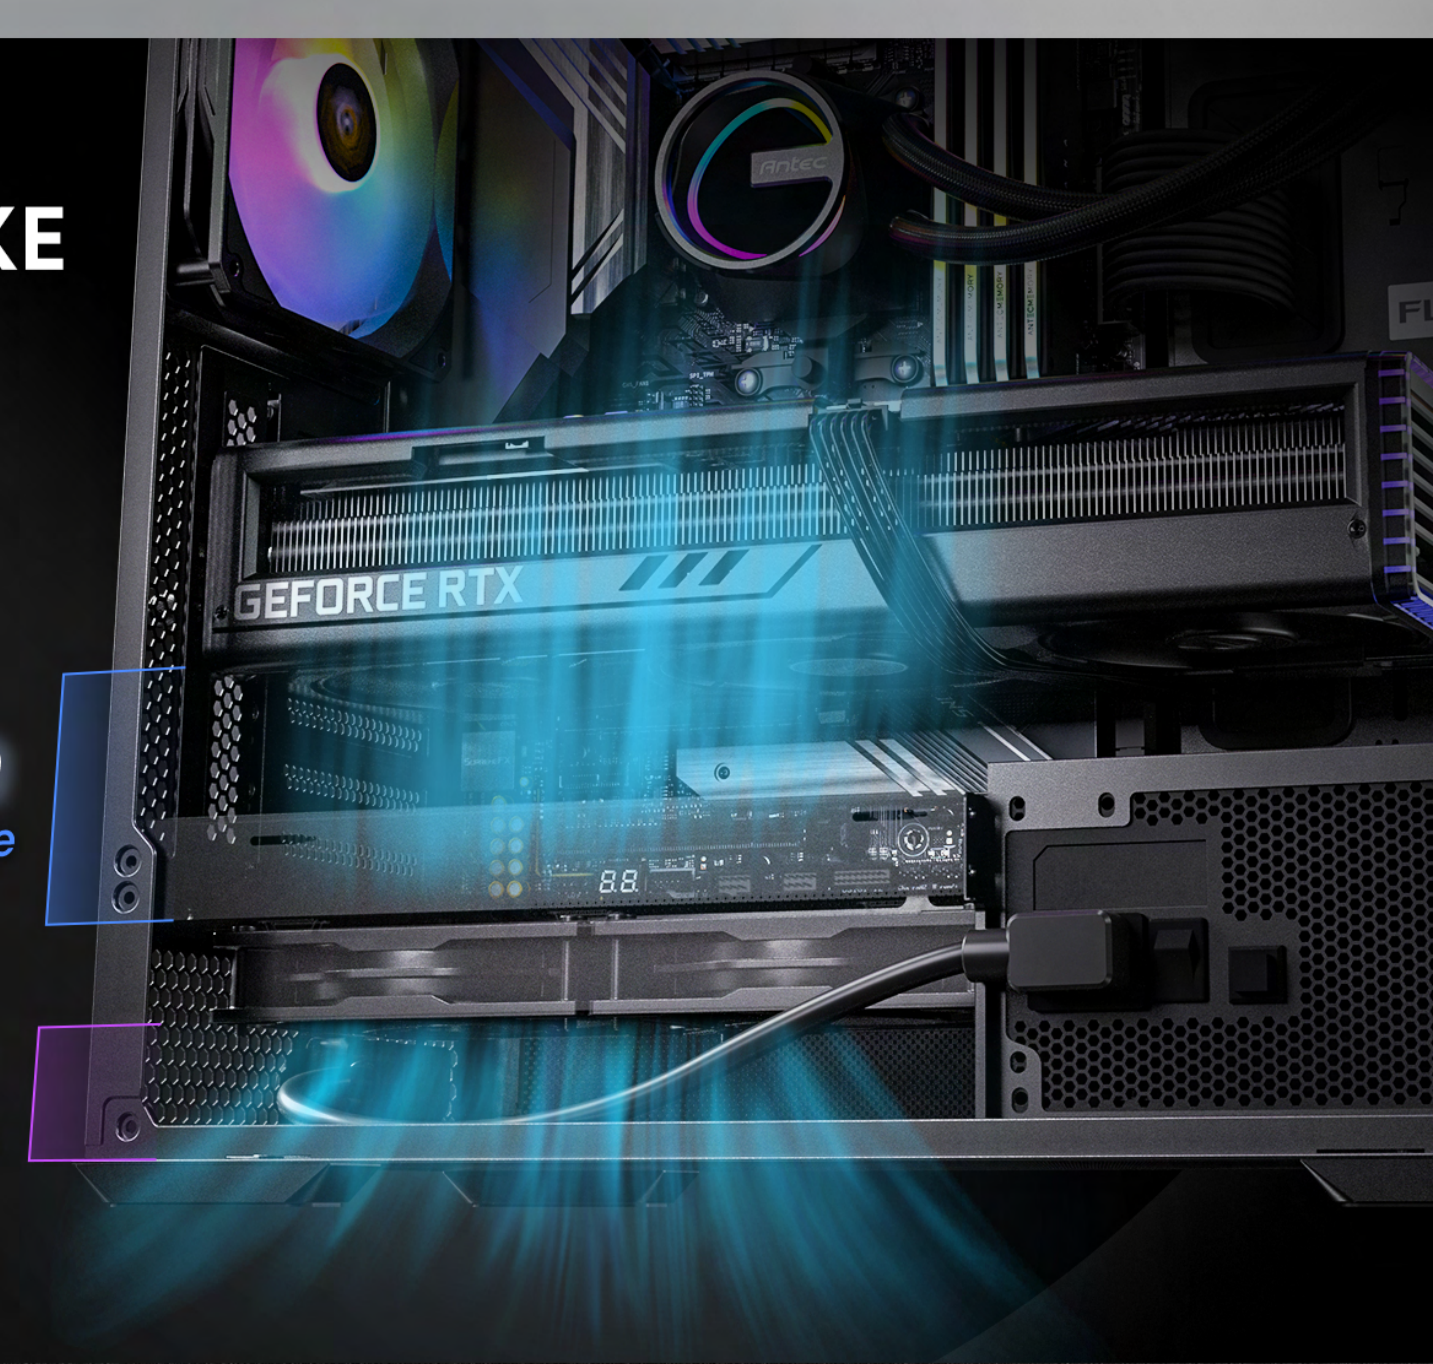
69-102mm
Graphics card space
38mm
Bottom space
GEFORCE RTX

PREMIUM WOOD

The front panel is crafted with a combination of metal mesh and premium wood to create a high-quality texture.

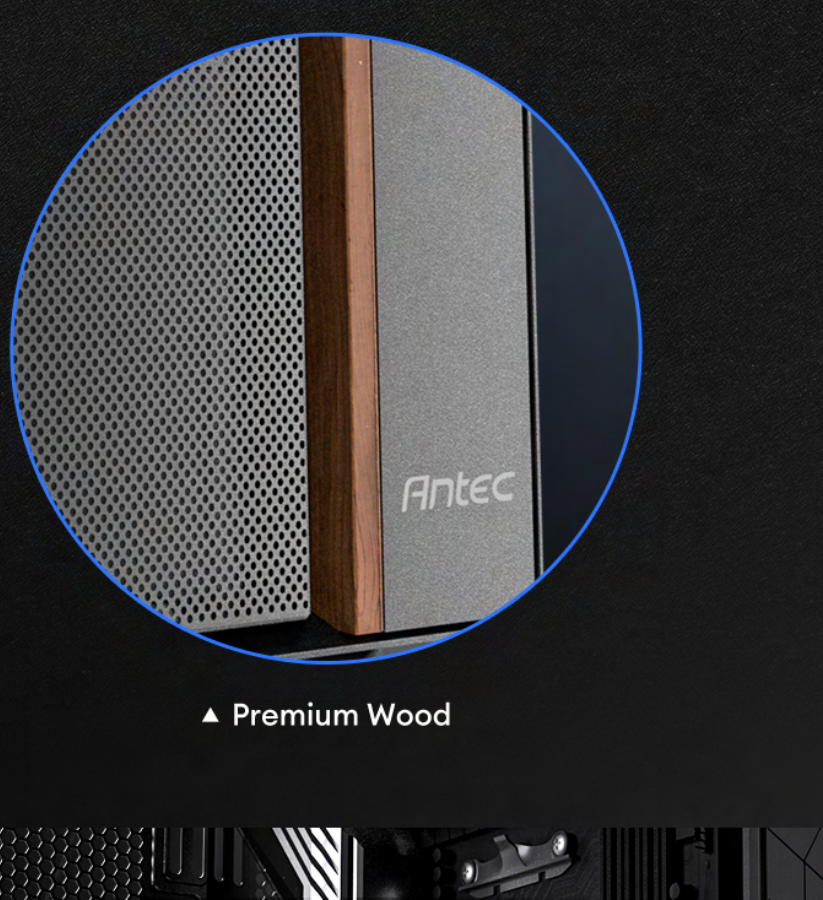

▲ Premium Wood

BUILT-IN GPU BRACKET

Includes a support bracket compatible with high-performance graphics cards.

SUPPORT BACK-CONNECT MOTHERBOARDS

Plug in cables from behind to give front a cleaner look and a smoother airflow channel.

*Supported models:
ASUS TUF B760M-BTF WIFI D4,
ASUS TX GAMING B760-BTF WIFI,
ASUS DIY-APE B760 REVOLUTION,
MSI B760M PROJECT ZERO,
MSI B650M PROJECT ZERO,
Colorful CVN B760M FROZEN WIFI V20,
and more to come.

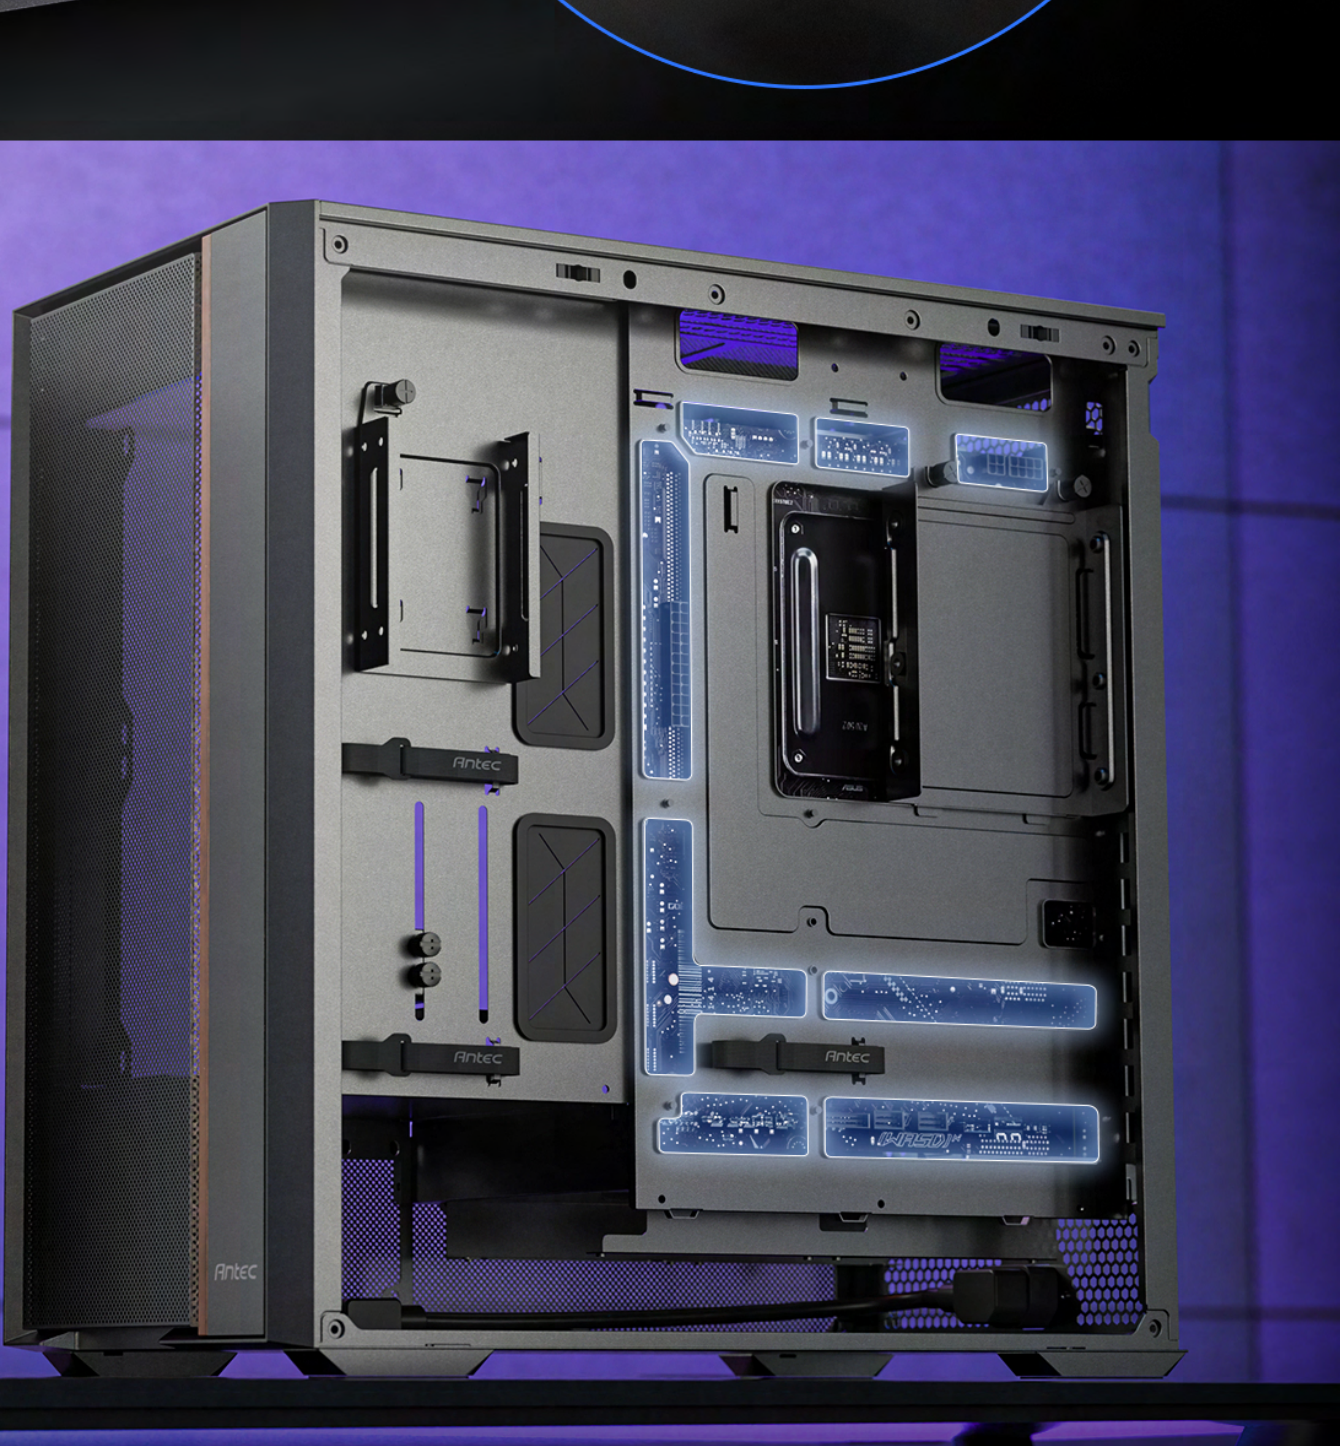

• TOP PANEL
• LEFT GLASS
& LEFT METAL PANEL

TOOL-FREE PANEL DESIGN

• FRONT PANEL
• RIGHT
METAL PANEL

FRONT-MOUNTED PSU CHAMBER & 13A EXTENSION CABLE

The front-mounted PSU chamber improves airflow by freeing up internal space, while the included 13A extension cable ensures stable power delivery for high-wattage PSUs.

POWER EXTENSION CABLE SETUP

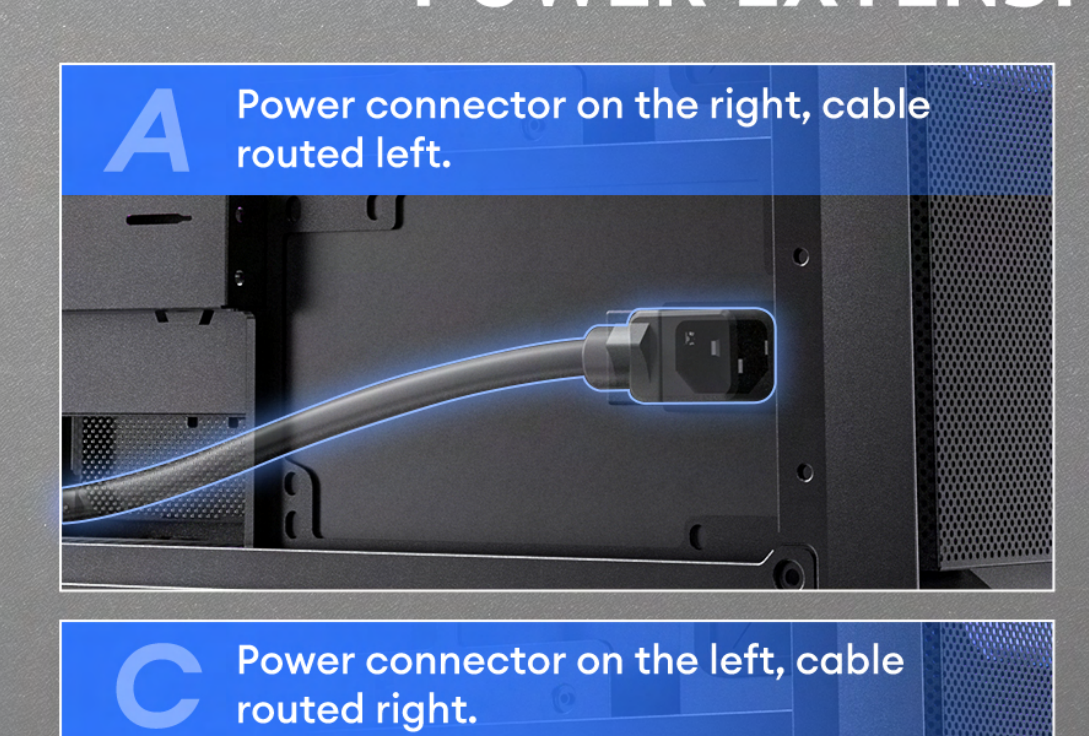

A Power connector on the right, cable routed left.

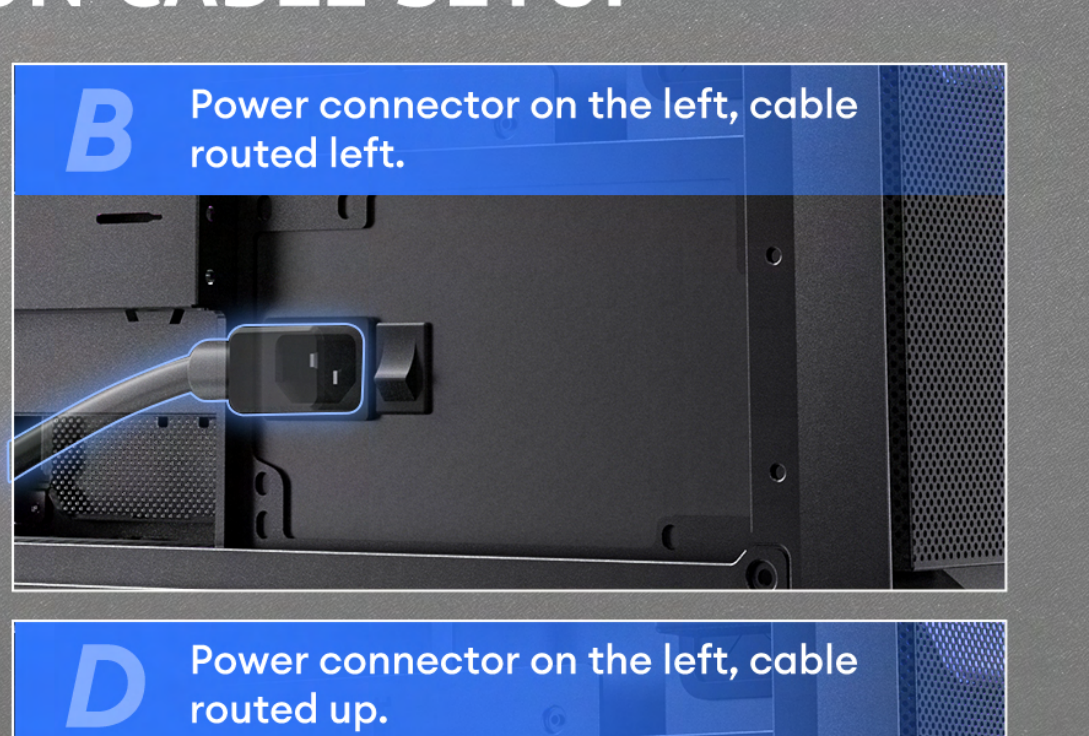

B Power connector on the left, cable routed left.

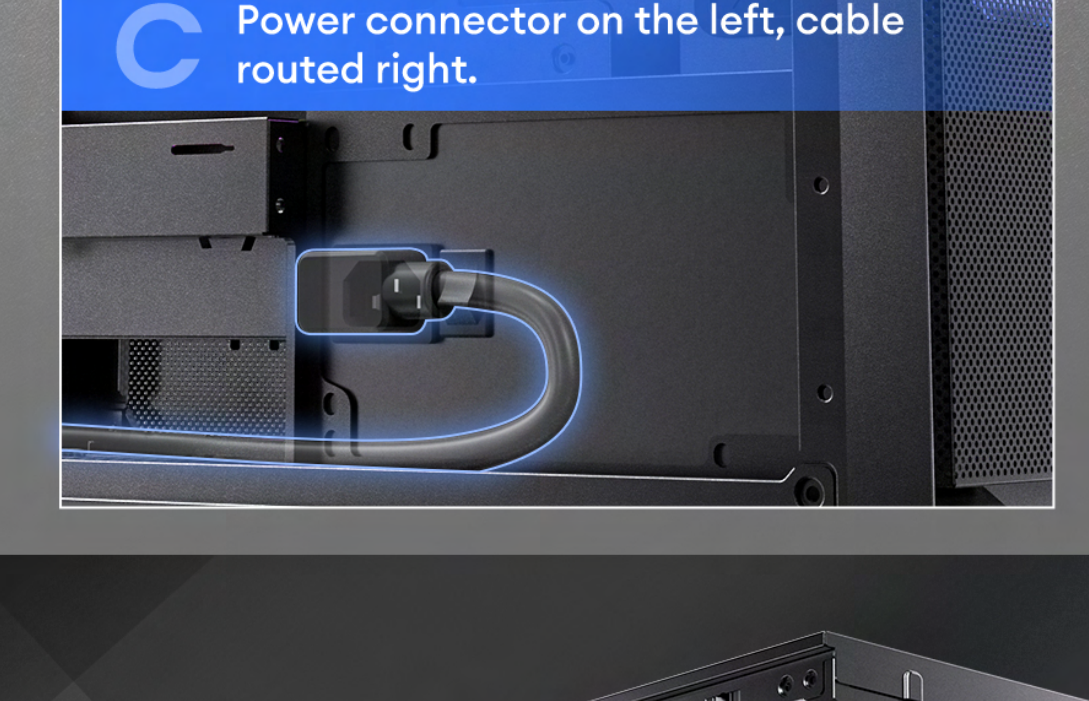

C Power connector on the left, cable routed right.

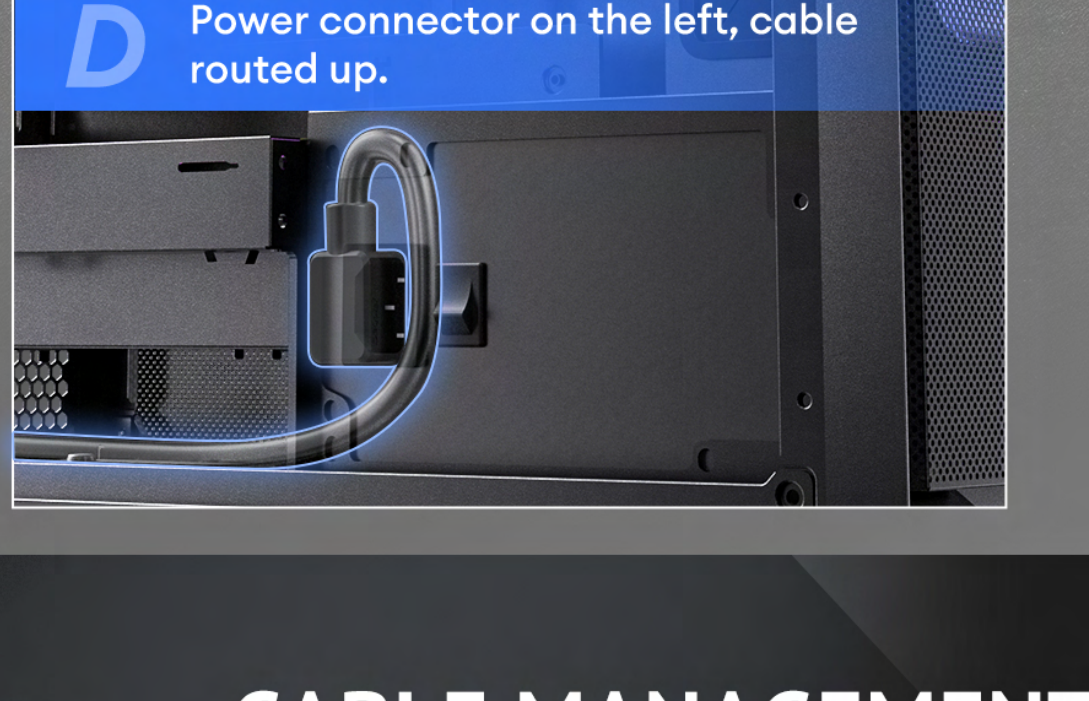

D Power connector on the left, cable routed up.

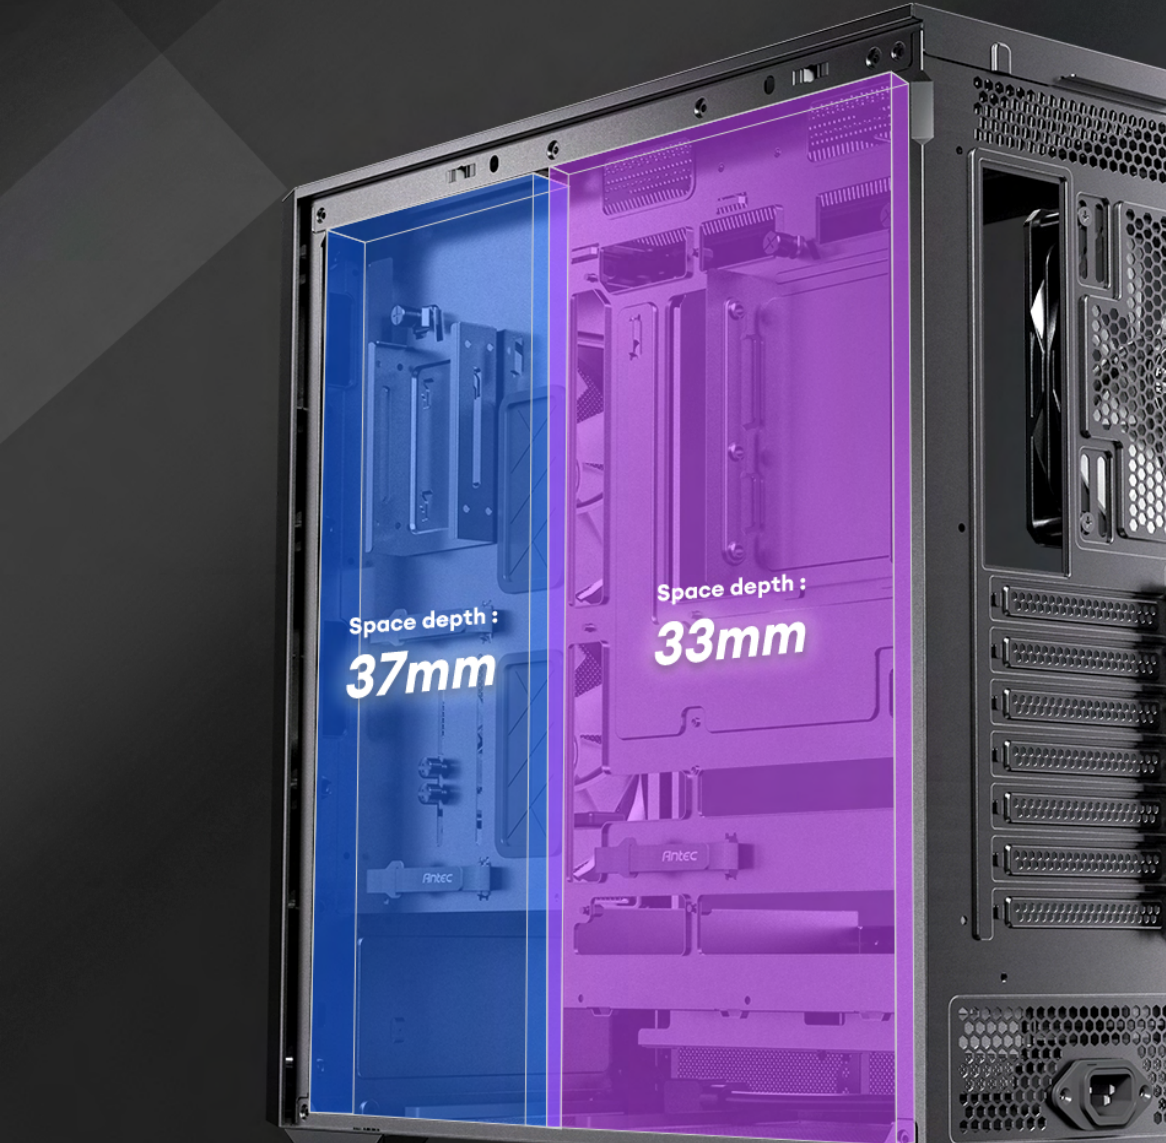
Space depth :
37mm
Space depth :
33mm

CABLE MANAGEMENT

Equipped with grommets and Velcro straps for easy, secure cable management, enhancing airflow and creating a cleaner look.

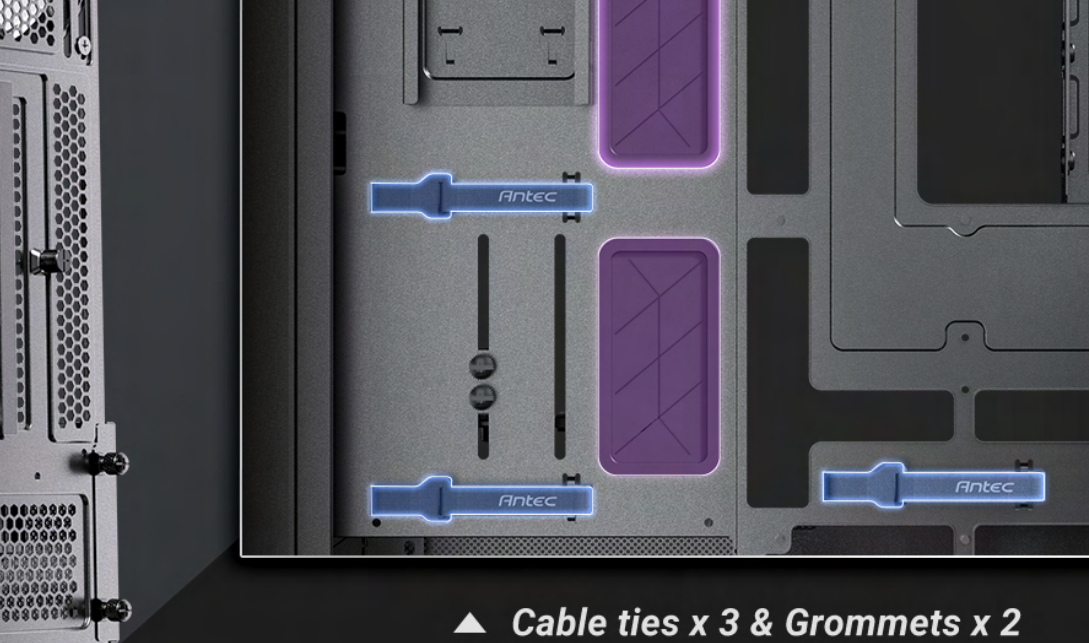

▲ Cable ties x 3 & Grommets x 2

I/O PANEL

Dust plugs included.

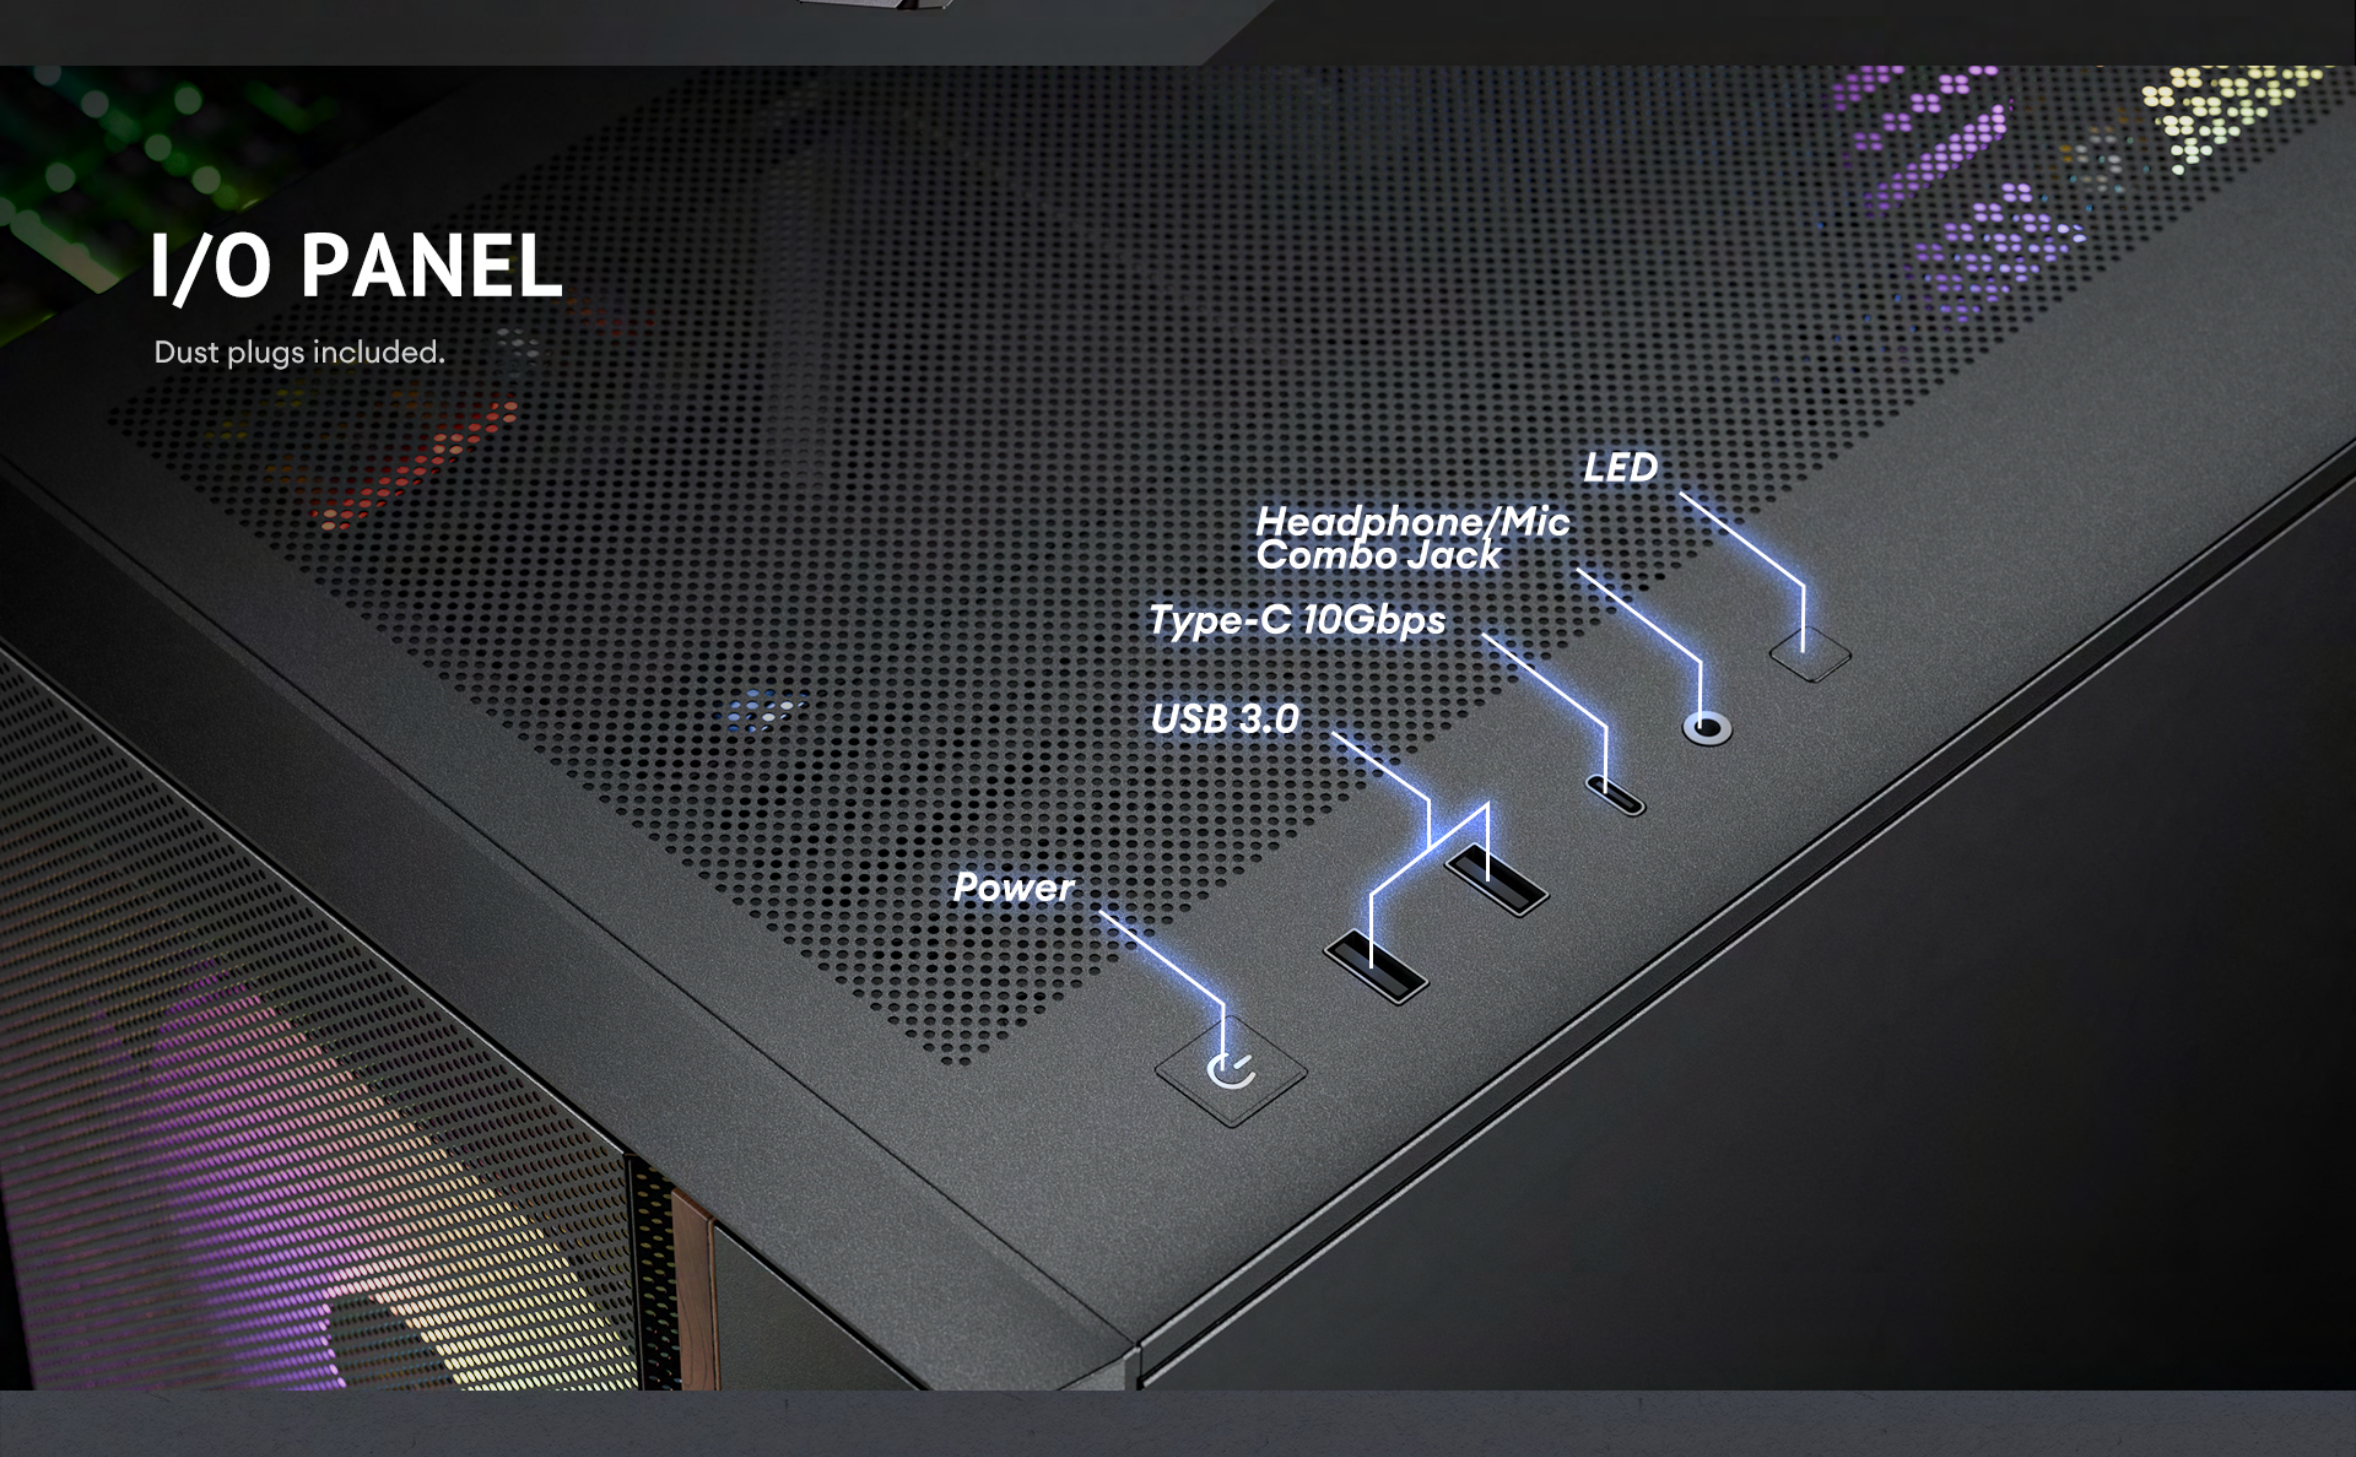
LED
Headphone/Mic
Combo Jack
Type-C 10Gbps
USB 3.0
Power

EXTENSIVE INTERIOR

• Motherboard support	ATX, Micro-ATX, ITX
• CPU cooler max height	≤ 180 mm
• GPU max length	≤ 400 mm

• Power Supply max length	(Without cable)≤ 170mm
• 3.5"	1
• 2.5"	2

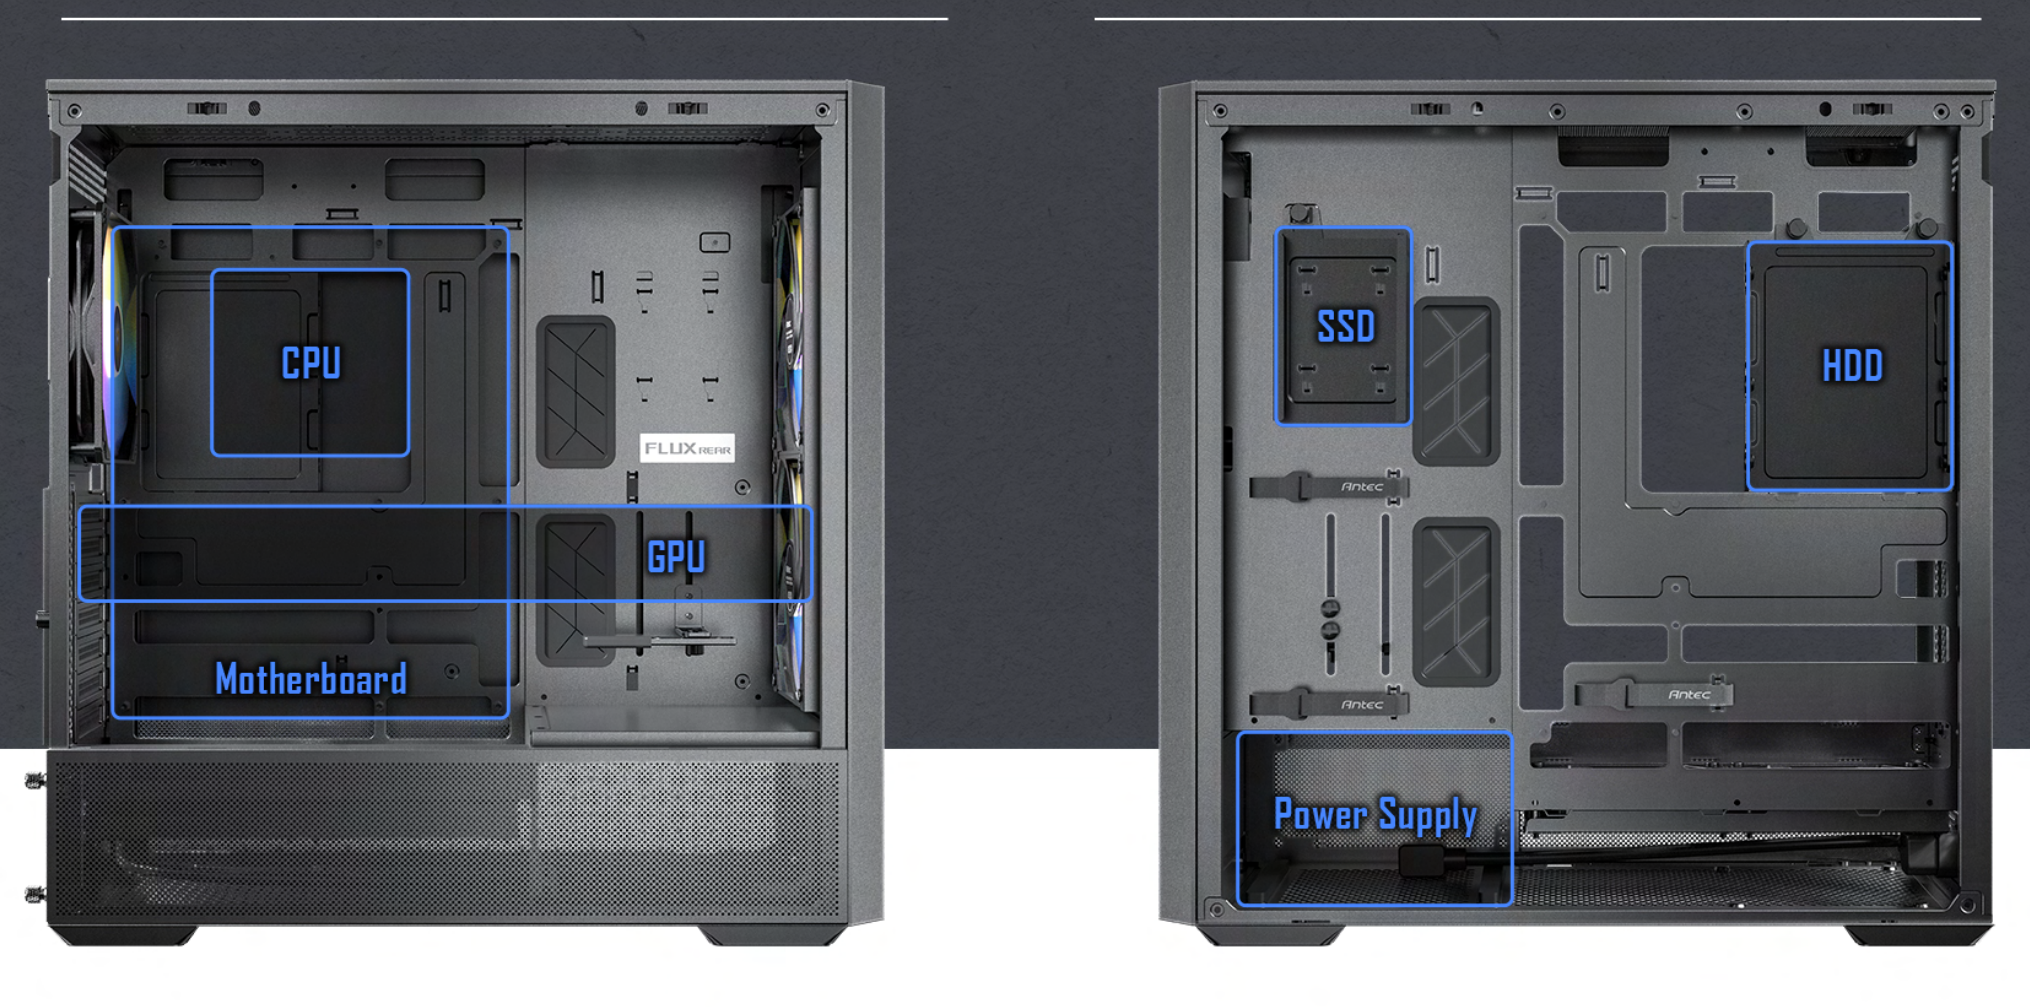
CPU
GPU
Motherboard
SSD
HDD
Power Supply

SPECIFICATION

Main Spec	
Motherboard Support	ATX, Micro-ATX, ITX
Form Factor	Mid Tower
Case Material	Steel + Plastic + Wood
Side Window Material	4mm Tempered Glass
I/O Ports	Power, LED Control Button, USB3.0 x 2, Type-C 3.2 Gen 2 (10Gbps) x 1, Headphone/Mic Combo Jack
Case Dimensions (DxWxH)	460 x 240 x 460 mm
Box Dimensions (DxWxH)	510 x 314 x 530mm

Compatibility & Clearances	
CPU Cooler Max Height	≤ 180mm
GPU Max Length	≤ 400mm
Power Supply Max Length	(Without cable)≤ 170mm

Fan Support	
Front	2 x 140mm
Top	3 x 120mm / 2 x 140mm
Power Supply Shroud	2 x 120mm
Rear	1 x 120mm / 1 x 140mm
Included Fan(s)	2 x 140mm ARGB PWM fans at the front + 2 x 120mm PWM reverse fans on the PSU shroud + 1 x 140mm ARGB PWM fan at the rear

Radiator Support	
Top	Up to 360mm
Rear	Up to 120mm

Expansion Slots	
Standard	7

Drive Bays	
3.5"	1
2.5"	2

General	
Dust Filter	Bottom
Net Weight	8.18 kg
Gross Weight	9.72 kg
Warranty	2 years
UPC#	0-761345-10241-4