



CONSTELLATION SERIES

CURVE AIR WHITE

CURVED GLASS PANEL

Curved glass design with three-sided tempered glass for a wide panoramic view.



VERTICAL COOLING

Supports up to 6 fans, with large area of vents around lower chamber, allowing for bottom-to-top vertical airflow.



MULTI-DIRECTIONAL AIR INTAKE AND MASSIVE AIRFLOW

Fine mesh top panel combined with extensive ventilation on the front, left, right, and bottom ensures powerful and consistent airflow.



BOTTOM AIR INTAKE OPTIMIZATION

Recessed dual fan mounts on the PSU shroud enhance bottom intake airflow.



PRE-INSTALLED 2 X 120MM PWM REVERSE FANS & 1 X 140MM PWM FAN

1X P14

140mm PWM fan

2 X P12 Reverse

120mm PWM fans



RADIATOR SUPPORT

Supports installation of 360mm radiator on the top.



SUPPORTS RTX 5090


The floating graphics card design prevents interference with side-mounted hardware.




SUPPORTS BACK-CONNECT MOTHERBOARDS

Rear cable connections keep the front clean and create a smoother airflow path.


*Supported models:
ASUS TUF B760M-BTF WIFI D4,
ASUS TX GAMING B760-BTF WIFI,
ASUS DIY-APE B760 REVOLUTION,
MSI B760M PROJECT ZERO,
MSI B650M PROJECT ZERO,
Colorful CVN B760M FROZEN WIFI V20,
and more to come.

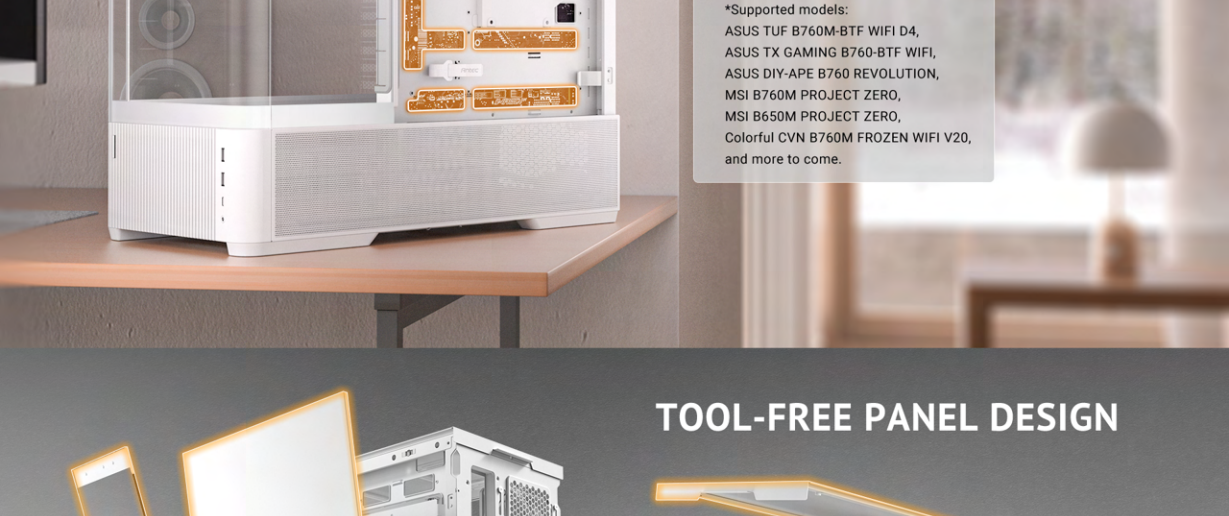

TOOL-FREE PANEL DESIGN

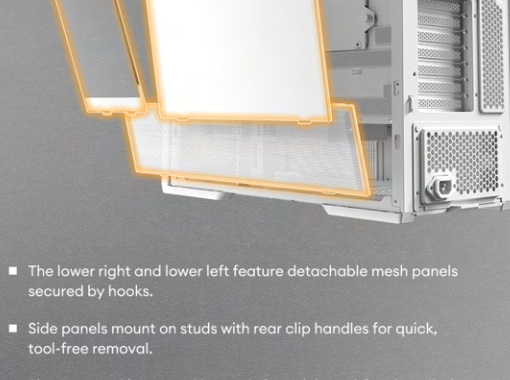

- The lower right and lower left feature detachable mesh panels secured by hooks.
- Side panels mount on studs with rear clip handles for quick, tool-free removal.
- The top panel is secured by studs for quick, tool-free installation.

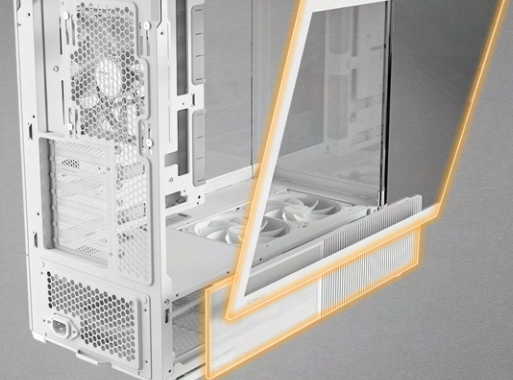



SIDE-MOUNTED PSU CHAMBER & 13A EXTENSION CABLE

Equipped with a 13A high-spec extension cable for stable power delivery and high-wattage PSU support.



POWER EXTENSION CABLE SETUP

Dual-orientation PSU installation with a 90° rotatable PSU module.

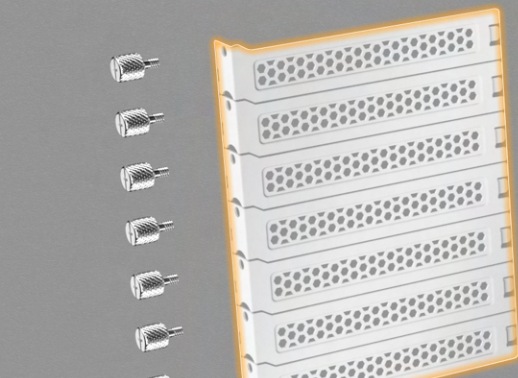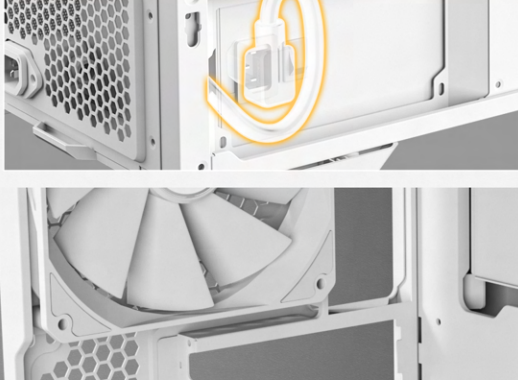

INDIVIDUAL PCIE SLOT COVERS

Comes with 7 PCIe slot covers.





I/O PANEL

- Power
- USB 3.0 x 2
- Type-C 10Gbps x 1
- Headphone/Mic Combo Jack






ADVANCED DUST PROTECTION

Pull-out bottom dust filter plus a lower front dust filter for enhanced dust protection.

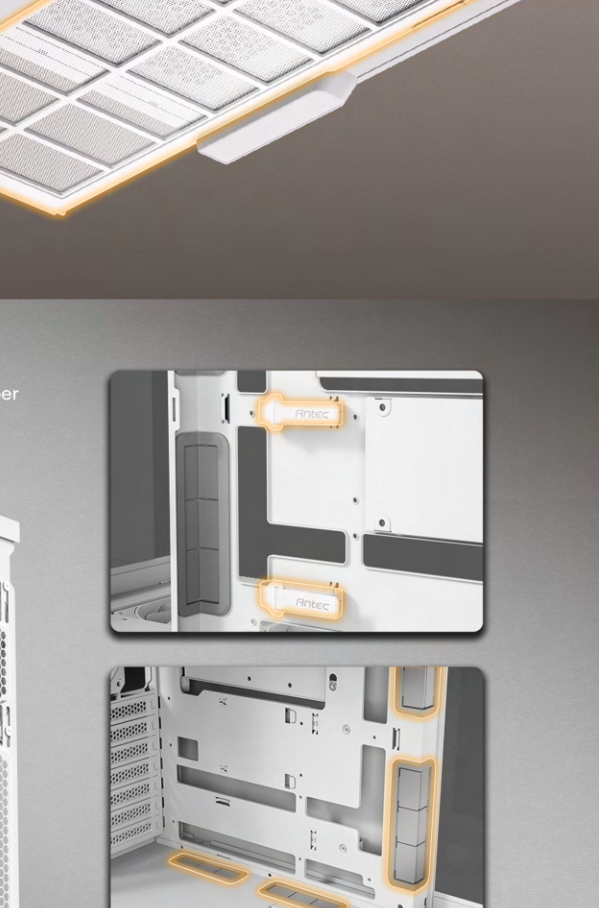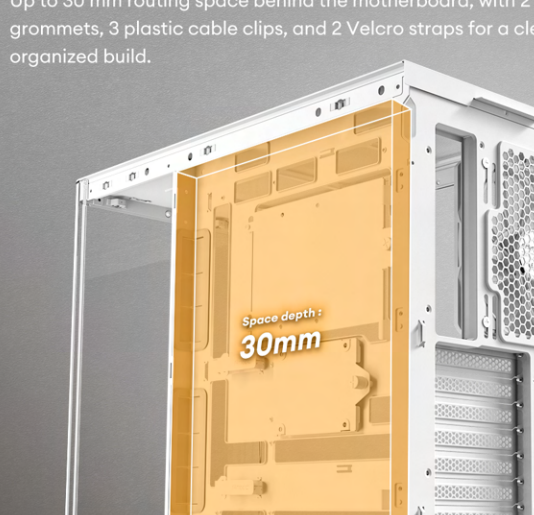



EASY CABLE MANAGEMENT

Up to 30 mm routing space behind the motherboard, with 2 rubber grommets, 3 plastic cable clips, and 2 Velcro straps for a clean, organized build.

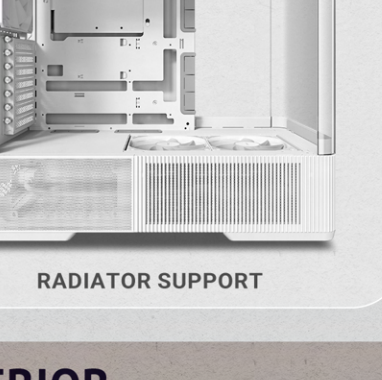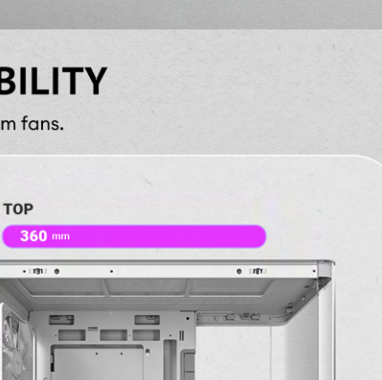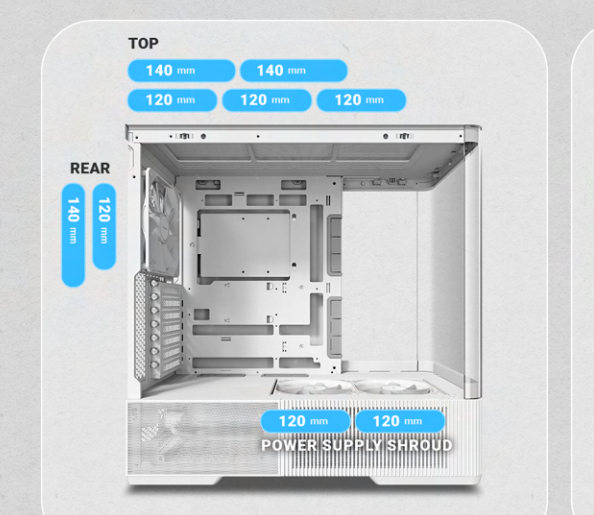

COOLING COMPATIBILITY



Simultaneously supports 6 x 120mm fans.

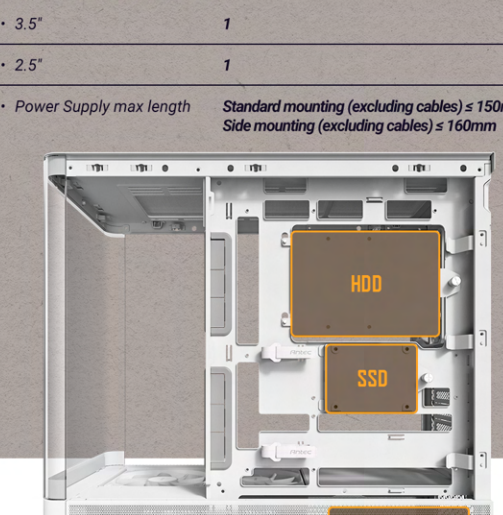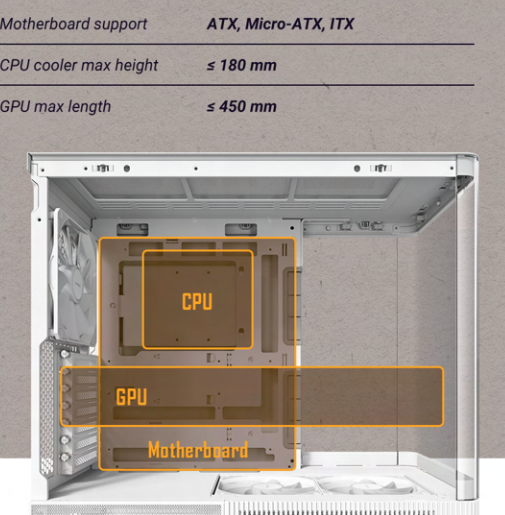

EXTENSIVE INTERIOR

- Motherboard support ATX, Micro-ATX, ITX
- CPU cooler max height ≤ 180mm
- GPU max length ≤ 450mm

- 3.5" 1
- 2.5" 1
- Power Supply max length Standard mounting (excluding cables) ≤ 150mm
Side mounting (excluding cables) ≤ 160mm

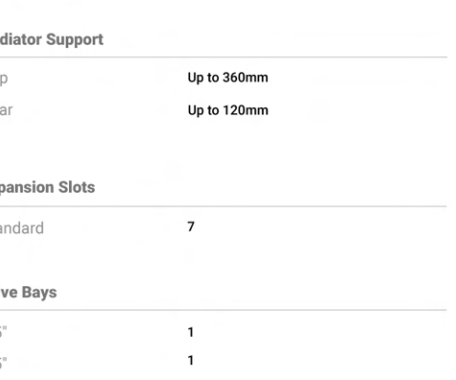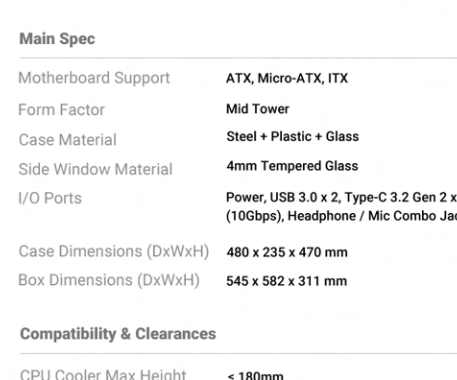

SPECIFICATION

Main Spec

Motherboard Support	ATX, Micro-ATX, ITX
Form Factor	Mid Tower
Case Material	Steel + Plastic + Glass
Side Window Material	4mm Tempered Glass
I/O Ports	Power, USB 3.0 x 2, Type-C 3.2 Gen 2 x 1 (10Gbps), Headphone / Mic Combo Jack
Case Dimensions (DxWxH)	480 x 235 x 470 mm
Box Dimensions (DxWxH)	545 x 582 x 311 mm

Compatibility & Clearances

CPU Cooler Max Height	≤ 180mm
GPU Max Length	≤ 450mm
Power Supply Max Length	Standard mounting (excluding cables) ≤ 150mm (For modular PSUs, the PSU chamber fan bracket must be removed.) Side mounting (excluding cables) ≤ 160mm

Fan Support

Top	3 x 120mm / 2 x 140mm
Power Supply Shroud	2 x 120mm
Rear	1 x 120mm / 1 x 140mm
Included Fan(s)	2 x 120mm PWM reverse fans on the PSU shroud + 1 x 140mm PWM fan at the rear

Radiator Support

Top	Up to 360mm
Rear	Up to 120mm

Expansion Slots

Standard	7
----------	---

Drive Bays

3.5"	1
2.5"	1

General

Dust Filter	Front / Bottom
Net Weight	9.12 kg
Gross Weight	10.79 kg
Warranty	2 years
UPC#	0-761345-10276-6