

COMPATIBLE Our new GSK V2 ATX3.1 power supplies are formally


ATX 3.1 & PCIE 5.1

certified for ATX 3.1 compliance, meeting the high standards for reliability and power efficiency, and ensuring the utmost level of quality and performance. The included PCIe 5.1 12V-2x6 GPU cable enables seamless compatibility with the latest graphics o such as the NVIDIA® GeForce RTX™ 50 Series.

less likely to get tangled or twisted. Braided cables also enhance the

HIGH-QUALITY BRAIDED CABLE

visual appeal when paired with a PC case, making cable management

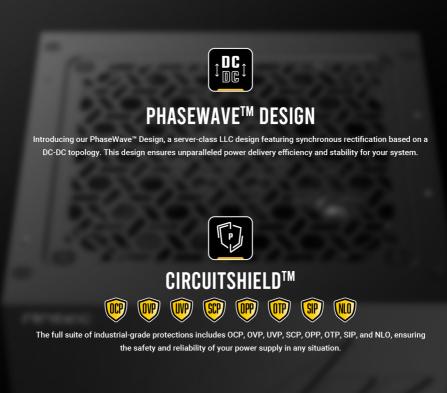




10-YEAR WARRANTY

The new PSU line from Antec pushes the standard for excellence with the circuit shield suite of industrial protections and is backed by a 10-year warranty.



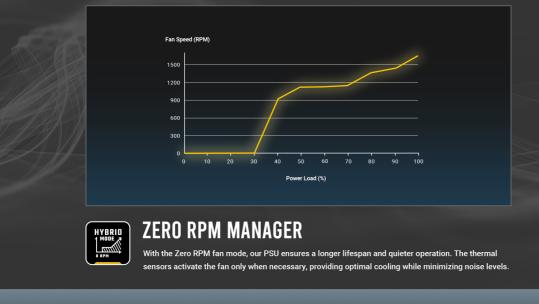



FULL MODULAR


COMPACT SIZE

of computer cases.

Compared to large power supplies on the market, it is smaller in size and can be use

CABLE MANAGEMENT

Allows users to use only the necessary cables and eliminates excess cables that can obstruct and reduce airflow for improved cooling performance.

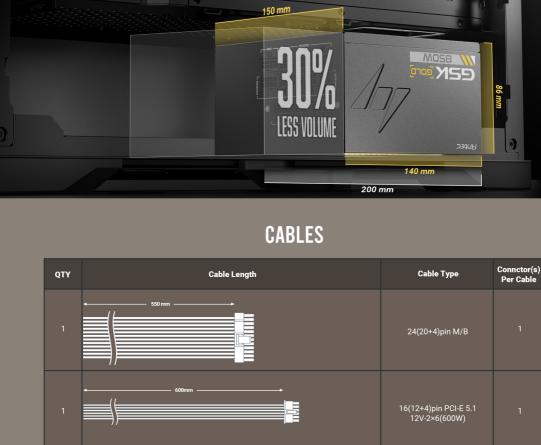

	11				
2	- 700 mm -			8(4+4)pin CF	PU 1
2 600 mm — 150 mm — 2				8(6+2)pin PC	I-E 2
450 mm			SATA	4	
1		1		Molex	4
		CONNI	ECTORS		
3 2 3 3 3 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		Mar.	Sele.		100
24-pin M/E Connector	3 16-pin PCI-E 5.1 s 12V-2×6(600W)	8(4+4)pin CPU Connectors	8(6+2)pin PCI-E Connectors	SATA Connectors	Molex Connectors
x1	x1	x2	x4	x8	х4

100-240V~, 50Hz-60Hz, 10A Max 200-240V~, 50Hz-60Hz, 10A Max / for China and Korea

+5V

20A

+3.3V

20A

INPUT

+12V

70.8A

-12V

0.3A

100W	849.6W	3.6W	15W
	850W		
	SPECIFICATION	S	
Model	GSK850 V2		
Safe Model	X7000A618XU-24V2		
Туре	ATX 12V 3.1		
Dimension	140(L)*150(W)*86(H)		

+5VSB

3.0A

Full-Modular	
10 years	
100V-240V	
10A Max	
50Hz-60Hz	
Active PFC	
100-150ms	
OCP, OVP, UVP, SCP, OPP, OTP, SIP, NLO	
850W	
0~40°C	
TUV/CB/CE/KC/UKCA/RCM/cTUVus/FCC/ICES/BSMI/3C/BIS	
120mm Silent Fan	
80 Plus Gold	
1 x 24(20+4)pin MB 1 x 16(12+4)pin PCIE 5.1 12V-2x6 2 x 8(4+4)pin CPU 4 x 8(6+2) Pin PCI-E 8 x SATA 4 x Molex	
296.5(L)*203(W)*130(H) (mm)	
680(L)*325(W)*228(H) (mm)	
2.50kg	
2.72kg	
	10 years 100V-240V 10A Max 50Hz-60Hz Active PFC 100-150ms OCP, OVP, UVP, SCP, OPP, OTP, SIP, NLO 850W 0~40°C TUV/CB/CE/KC/UKCA/RCM/cTUVus/FCC/ICES/BSMI/3C/BIS 120mm Silent Fan 80 Plus Gold 1 x 24(20+4)pin MB 1 x 16(12+4)pin PCIE 5.1 12V-2x6 2 x 8(4+4)pin CPU 4 x 8(6+2) Pin PCI-E 8 x SATA 4 x Molex 296.5(L)*203(W)*130(H) (mm) 680(L)*325(W)*228(H) (mm)

0-761345-20148-3 GSK850 V2 JP 0-761345-20147-6 GSK850 V2 GB 0-761345-20146-9 GSK850 V2 EC 0-761345-20145-2 GSK850 V2 AU 0-761345-20144-5 GSK850 V2 AR